


KIRTLAND GOLFERS RIDE TO 18TH TEE

Probably the most unique installation in the history of golf course maintenance is the electrically operated cable car which was installed this spring at the Kirtland Country Club, Willoughby, O. The 17th green at Kirtland is in a valley and the 18th tee on top of a hill. It was a long tiresome and sometimes dangerous climb for the older members at the finish of their round of golf. So Mr. Walter L. Robison of the Green committee conceived the plan of the automatic car lift which you see pictured herewith.

The driving equipment consists of a 35 H. P. Westinghouse, elevator type, two speed motor with push button control. The hoist is of the Lidgerwood double reduction cylindrical drum type designed for a car speed of approximately 200 ft. per minute. The length of the incline is about 250 ft. equivalent to a lift of 75 feet. The entire installation is enclosed with 650 ft. of Page Chain Link fence style 3TR 7' high overall, installed by the Betz-Pierce Co. of Cleveland, O. Upper photo shows the 17th green.
Published by courtesy of The Bystanding

THE BYSTANDER Photos by James Meli

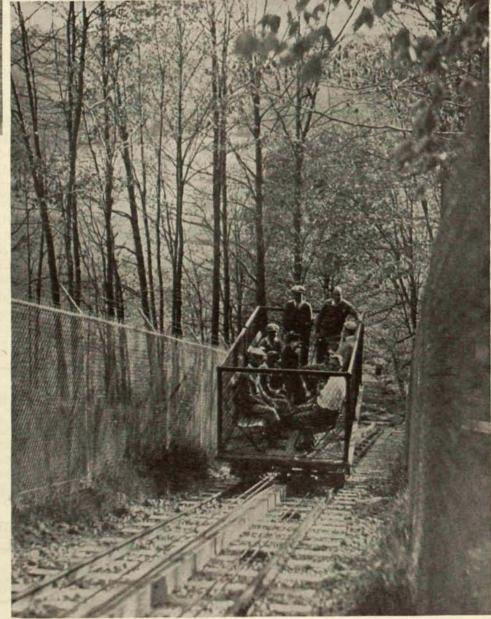

PAGE THIRTY-ONE