

## **MSU Extension Publication Archive**

Archive copy of publication, do not use for current recommendations. Up-to-date information about many topics can be obtained from your local Extension office.

Get Rid of the Drip in Your House  
Michigan State University  
Cooperative Extension Service  
James S. Boyd, Professor, Agricultural Engineering Department  
August 1974  
2 pages

The PDF file was provided courtesy of the Michigan State University Library

**Scroll down to view the publication.**



# COOPERATIVE EXTENSION SERVICE


Departments of  
Human Environment and Design  
Agricultural Engineering  
Urban Planning and Landscape Architecture

## MICHIGAN STATE UNIVERSITY


Extension Bulletin E-811

### GET RID OF THE DRIP IN YOUR HOUSE



Do you have a drip in the house? These drips can waste water, be annoying, and waste energy if the drip is in the hot water faucet. Now is the best time to stop that drip.

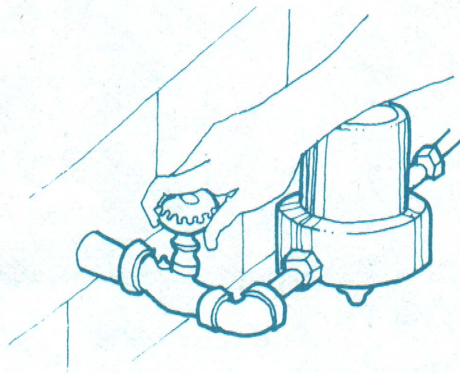


1. Shut off the water to the faucet, either at the pump or where the supply enters the house which is usually on the side next to the street. It should be near the water meter. Some installations have a valve under the sink or lavatory and this is convenient.




2. On some faucets the handle must be removed to get at the bonnet. To do this remove the screw on the top of the faucet and remove the handle.

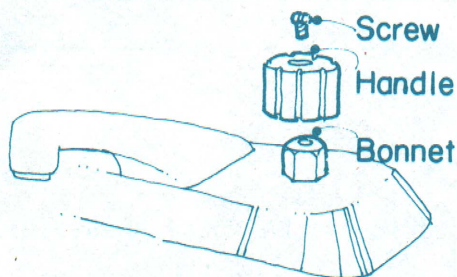


2a. Different Types Of Faucet Handles

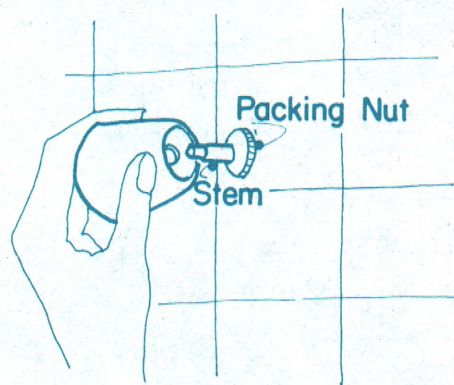

2b. Shower Faucet Handle


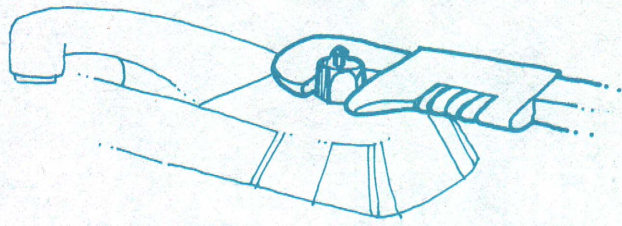


3. With a monkey wrench or adjustable wrench remove the bonnet.

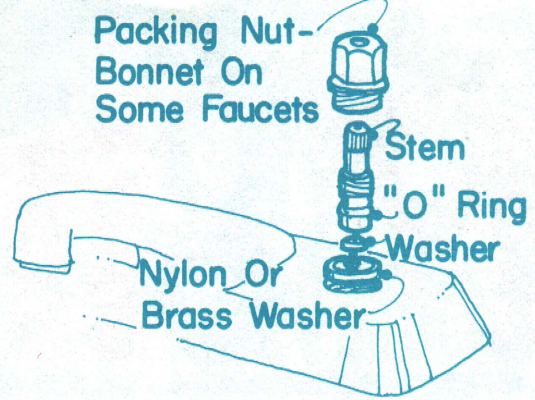

4. Remove the valve stem by rotating the handle in the same direction as you would to shut the water off. The assembly should come out.

5. Remove the screw on the bottom and pry out the old rubber washer. Be sure to replace the washer with the same size and type. If you do not have a washer of the appropriate size you might try reversing the present washer. This would be a temporary solution especially if the washer is a flat disc and not a coned washer. Measure the diameter. For the first replacement buy a package of assorted sizes and remember what size your faucet requires.

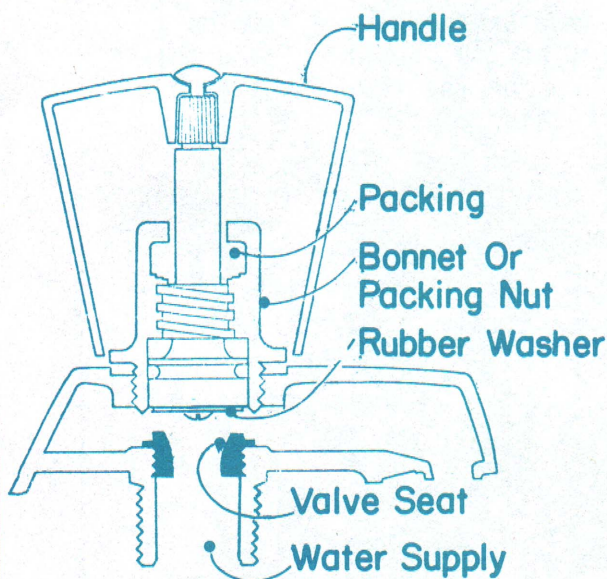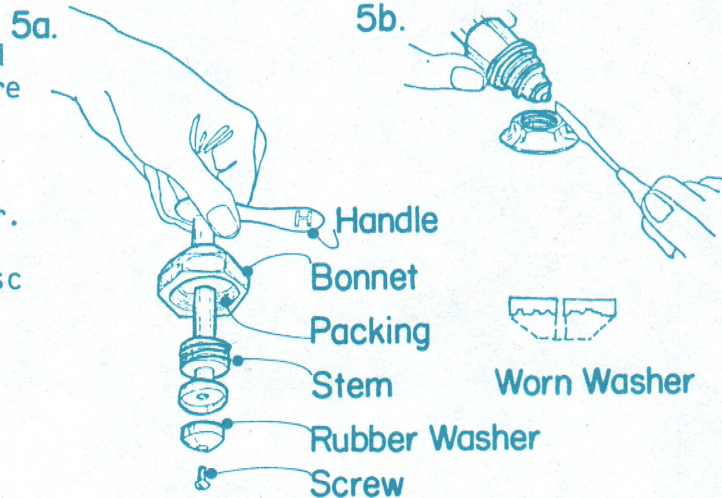

6. Check the valve seat to be sure it is not scored.

7. Replace the faucet assembly in the reverse order you disassembled the faucet.

The drip in the house should be gone.