

MSU Extension Publication Archive

Archive copy of publication, do not use for current recommendations. Up-to-date information about many topics can be obtained from your local Extension office.

Get Rid of the Drip in Your House

Michigan State University

Cooperative Extension Service

Revised by Carol W. Selby Saginaw County Extension Home Economist

Betty A. Shelby Kent County Extension Home Economist

October 1983

4 pages

The PDF file was provided courtesy of the Michigan State University Library

Scroll down to view the publication.



COOPERATIVE EXTENSION SERVICE


Departments of
Human Environment and Design
Agricultural Engineering
Urban Planning and Landscape Architecture

MICHIGAN STATE UNIVERSITY

Extension Bulletin E-811 (Revised) October 1983



GET RID OF THE DRIP IN YOUR HOUSE

Do you have a drip in the house? These drips can waste water, be annoying, and waste energy if the drip is in the hot water faucet. Now is the best time to stop that drip.

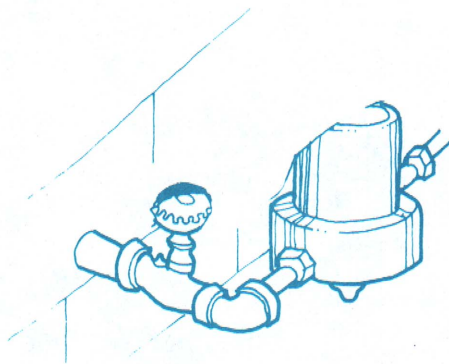


1. Shut off the water to the faucet, either at the pump or where the supply enters the house which is usually on the side next to the street. It should be near the water meter. Some installations have a valve under the sink or lavatory and this is convenient.

FILE COPY
DO NOT REMOVE

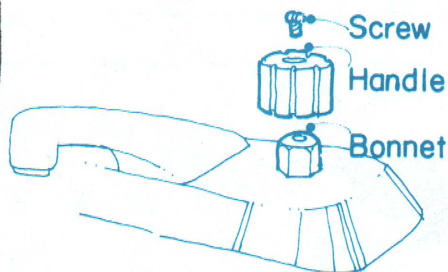


2a. Different Types Of Faucet Handles

2. On some faucets the handle must be removed to get at the bonnet. To do this remove the screw on the top of the faucet and remove the handle.

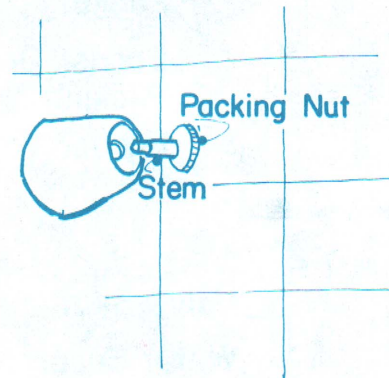


2b. Shower Faucet Handle

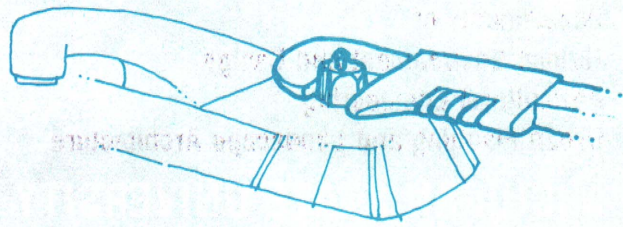

3. With a monkey wrench or adjustable wrench remove the bonnet.

Packing Nut-
Bonnet On
Some Faucets


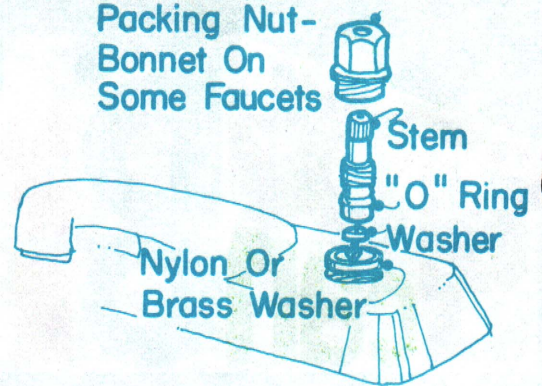


4. Remove the valve stem by rotating the handle in the same direction as you would to shut the water off. The assembly should come out.

5. Remove the screw on the bottom and pry out the old rubber washer. Be sure to replace the washer with the same size and type. If you do not have a washer of the appropriate size you might try reversing the present washer. This would be a temporary solution especially if the washer is a flat disc and not a coned washer. Measure the diameter. For the first replacement buy a package of assorted sizes and remember what size your faucet requires.

5a.

5b.

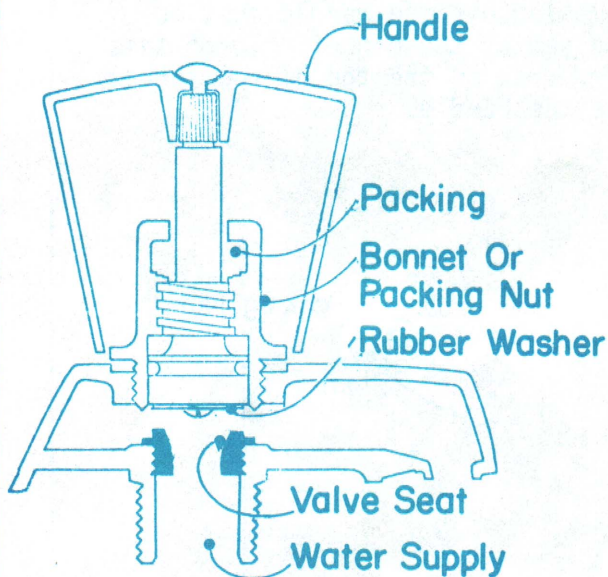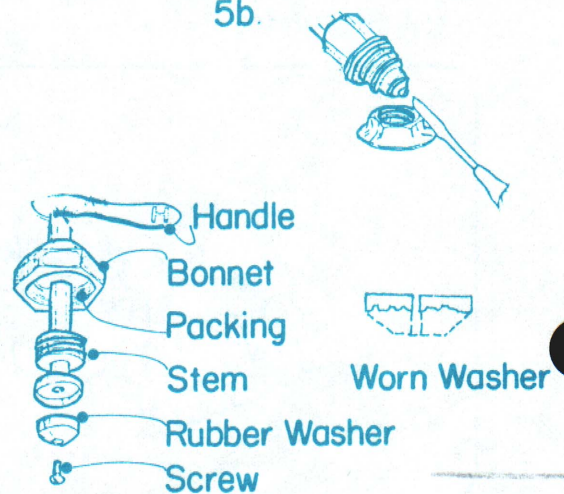

6. Check the valve seat to be sure it is not scored.


7. Replace the faucet assembly in the reverse order you disassembled the faucet.

The drip in the house should be gone.

REPAIRING SINGLE-LEVER FAUCETS



By: Carol Selby, Extension Home Economist, Saginaw County and Betty Shelby, Extension Home Economist, Kent County.

Single-lever (one handle) faucets are trickier to repair than the stem faucets mentioned on pages 1-2. There are several different styles of single-lever faucets, with each being repaired differently and some often requiring special tools for disassembly. Most manufacturers sell a complete repair kit for their brand of faucet. The rotating ball faucet is the most common, and below are the steps in its repair.




1. Under the shank of the handle is a set screw which must be removed with a hex wrench. Do not take the screw all the way out. It is easily lost.

2. If the drip is from the spout, replace the two rubber valve seats and steel springs in the bottom of the faucet body. Unscrew the cap assembly and lift out the ball/stem and cam assembly.

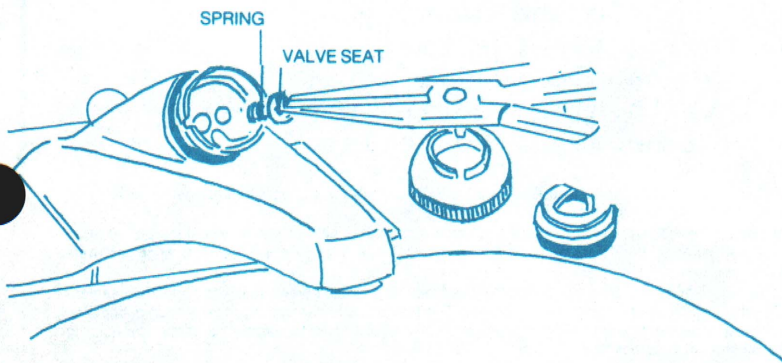
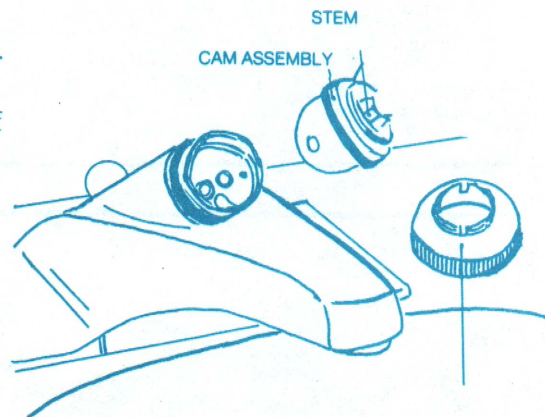


3. With fingers or long nose pliers, remove the valve seats and springs. Push replacements firmly into place. While you have the ball out, check for corrosion and replace if necessary.

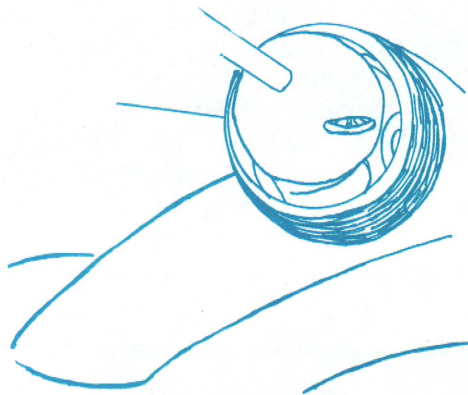

4. When replacing the ball, make sure that the peg that projects from the side of cavity fits into the oblong slot on the ball.

5. Replace the cam assembly as shown, making sure that the small tab on the side fits into a slot on the faucet body; screw on the cap assembly.

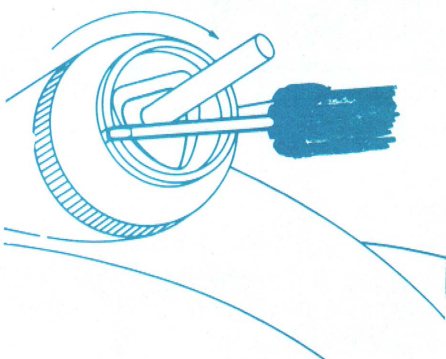

6. Before reattaching the faucet handle check for leaks around the stem by moving the ball/stem to the "on" position. If there is a leak, use the tip of a small screwdriver to tighten the adjusting ring by turning it clockwise. If, in order to stop the leak, you have to tighten the ring so that the handle is difficult to work, then the entire cam assembly needs to be replaced.

MICHIGAN STATE UNIVERSITY



COOPERATIVE
EXTENSION
SERVICE

MSU is an Affirmative Action/Equal Opportunity Institution. Cooperative Extension Service programs are open to all without regard to race, color, national origin, sex, or handicap.

Issued in furtherance of cooperative extension work in agriculture and home economics, acts of May 8, and June 30, 1914, in cooperation with the U.S. Department of Agriculture. Gordon E. Guyer, Director, Cooperative Extension Service, Michigan State University, E. Lansing, MI 48824.

This information is for educational purposes only. Reference to commercial products or trade names does not imply endorsement by the Cooperative Extension Service or bias against those not mentioned. This bulletin becomes public property upon publication and may be reprinted verbatim as a separate or within another publication with credit to MSU. Reprinting cannot be used to endorse or advertise a commercial product or company.

O-14545

1P1R-10M-11:83-DG-UP, Price 15 cents. Single copy free to Michigan residents.