



## I R O N S

Beaver TM708. The legendary 7-gang hydraulic mower has a huge 16ft cut to mow fairways in championship time. Fully floating 8" or fixed 10" cylinder heads, with a choice of blade configurations and rollers, follow the fairway contours to leave a superb finish.



## W O O D S

Where the fairways stop, the Beaver T12 starts. With its 74" cut, hydrostatic transmission, low centre of gravity and 7" cylinders with 4 or 7 blade option, it's ideal for mowing around tees, surrounds, bunkers and fences.

**HAYTER BEAVER**  
GRASS PARTNERS

AD  
REF  
90

HAYTERS PLC, SPELLBROOK  
BISHOP'S STORTFORD, HERTS. CM23 4BU  
TEL: BISHOP'S STORTFORD (0279) 723444

# In search of the perfect CUT



by BRIAN MITCHELL


Two basic principles are used in cutting unit adjustment, these being:

■ *Reel adjusted down on to the bottom blade* – This is the system generally used in Europe and is the method used on all Ransomes cutting units except trailed gang mowers. Ransomes trailed gang mower design is based on the original Worthington Patents (USA) and the original method of adjustment has been retained.

■ *Bottom blade adjusted up to the reel* – This is the system used generally in North America and no doubt is based on the original Worthington Patents, the method being extended from its initial trailed gang unit application to all other types of cutting unit.

## Trailed Gang Unit Requirement

In trailed gang units the cutting reel is driven through a system of gears from the ground engaging the wheels of the unit. In such a drive system it is of course essential to maintain a constant centre distance between the intermediate gear and reel pinion and this constraint makes it desirable to have a fixed position for the reel.



1. Wheel
2. Gear
3. Intermediate gear
4. Reel
5. Pinion
6. Rear roll
7. Bottom bar and bottom blade

An alternative would be possible by providing a reel bearing housing which pivots about the centre of the intermediate gear, but this would lead to a more complex design and would make the 'quick removal' of a cutting reel from the frame more difficult to achieve.


There is good reason, therefore, on a trailed gang unit to position the reel in a fixed position within the cutting unit frame and to adjust the bottom block up to the reel.

## The European method of reel and bottom blade adjustment

This is used by all major UK and European manufacturers of commercial grass cutting machinery and provides several benefits.


■ *Cutting Unit Frame Design:* This usually takes the form of two side plates which are connected either by tubular

cross members or pressed steel top plates or tie bars and the frame may either be a welded or bolted fabrication.

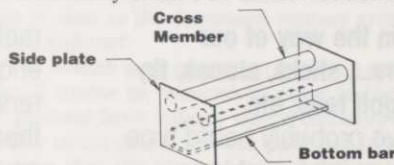

The stiffest part of any cutting unit, however, is the bottom block and if this can be rigidly connected to the side plates it contributes greatly to the overall rigidity of the frame assembly.

■ *Cutting Unit Adjustment:* With any reel mower it is necessary to maintain correct adjustment between the reel and bottom blade as the cutting surfaces wear. This wear will be greater on the bottom blade than the reel due to the fact that wear on the reel is 'shared' between a multiplicity of blades. Even so, there may well be a difference in reel diameter of up to 3/4" between a new reel and one which has reached the end of its life. By adjusting the reel down on the blade, this wear has no influence on the ability to retain the original minimum cutting height.

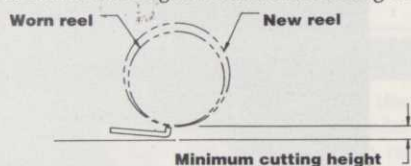

■ *Reel and Bottom Blade Alignment:* Even on newly built cutting units there are likely to be slight degrees of misalignment between the reel and bottom blade due to manufacturing tolerances. Efficient grass cutting can only be achieved with quite precise adjustment between the reel and bottom blade and this adjustment needs to be achieved across the whole width of the reel and bottom blade.

Any slight misalignment which may exist can be compensated for by making more – or less – adjustment on one end of the unit or the other, thus ensuring correct setting across the whole width of the unit.

Misalignment is likely to increase during the life of the cutting unit due to unequal wear of the reel blades and bottom blade and possible inaccuracies in re-grinding. By adjusting the reel top the bottom blade, the normal internal clearances of the reel bearings or the use of self-align-

# NOTHING STANDS IN THE WAY OF OUR CYLINDERS.



**"Nothing stands in the way of our replacement cylinders.... sticks, stones, tin cans, glass bottles, golf tees, etc."**

A statement you have probably heard time and time again but never been able to believe, until **now**.


At Supreme Mowing we not only state this fact, but more importantly guarantee our replacement cylinders against breakage upon hitting a movable object.

The use of the finest British Steels and advanced

methods of production and heat treatment enable us to manufacture products that are renowned for their accuracy and reliability, therefore giving you a longer working life and a cleaner cut.

There is a cylinder to fit any make and size of mower, Ransomes... Toro... Jacobsen... Dennis... Shanks... Atco...

Nickerson... Agria...  
Hayter... Greens...  
National...  
Morrison...  
Sabo...

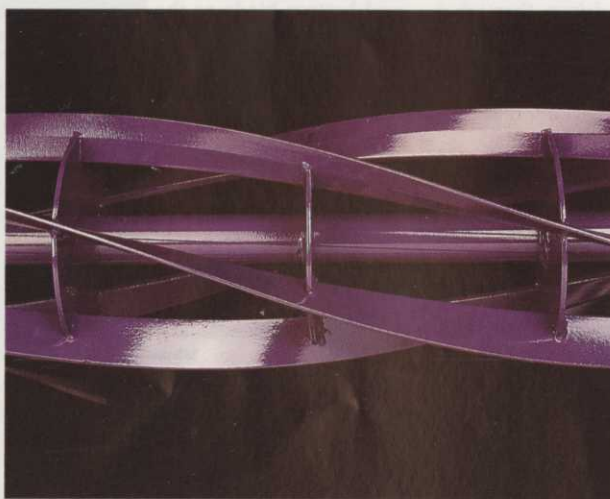

**S U P R E M E  
M O W I N G**


Wet Moor Lane, Wath-Upon-Deerne, Rotherham, S63 7LR. Tel: (0709) 873436 Fax: (0709) 878005

A Ransomes PLC Company


# In search of the perfect **CUT**

3 ➔

ing bearings allow varying degrees of adjustment from one side of the unit to the other without inducing strain into any component. The adjustment is made by having an independent adjustment means at each end of the reel.

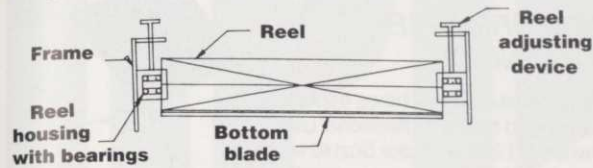

■ **Bottom Blade Position:** It is advantageous to maintain the cutting edge of the bottom blade as the closest point to the turf. This enables minimum cutting heights to be achieved which are limited only by the height of the knife lip.




Increased clearance between the rear of the bottom blade ensures minimum drag on the turf and also, in conditions where matt or thatch is present, helps ensure that the unit does not 'sit on' the matt, due to a large area of surface contact between the turf and bottom blade. With a small area of contact the unit will cut down into the matt.

## USA Method of bottom blade to reel adjustment


This is used by most of the major US manufacturers of commercial reel mowers and is the method generally recognised by US customers as being superior to the European system. The US system does, however, have a number of disadvantages.

■ **Cutting Unit Frame Design:** Being pivoted on the cutting unit side plates, the bottom block does not contribute significantly to the overall strength and integrity of the cutting unit frame. The reel is, of course, located in a fixed position within the frame, but again, because it is mounted in bearings, cannot completely compensate for the overall reducing rigidity caused by non-rigid mounting of the bottom block.

■ **Cutting Unit Adjustment:** By adjusting the bottom blade up to the reel, the minimum possible height of cut will increase as the bottom blade and reel wears. Until relatively recently this would not have been a significant disadvantage in the USA, due to their use of higher cutting height than is the case in Europe. However, on golf course applications now, lower and lower cutting heights are being used in the USA and the attitude of the bottom blade becomes a significant feature.



■ **Reel and Bottom Blade Alignment:** Any misalignment between reel and bottom blade caused by manufacturing tolerances or uneven wear (see *Reel and bottom blade alignment* on Page 3) can only be compensated for by twisting the bottom block. For this reason our trailed gang units are fitted with 'bottle jack' type adjusters so that a twisting force can be induced into the bottom block. On other units 'opposing screw' type adjustment is used at each end of the bottom block to achieve the same result. Misalignment due to initial manufacturing tolerances or subsequent wear can be removed by




'backlapping' and this may well be the reason that backlapping is carried out as a matter of course in the USA to ensure that correct adjustment of the bottom blade to reel is achieved.

In general, backlapping is used far less frequently in Europe and then as a means of maintaining a keen cutting edge rather than correcting undue mis-match between reel and bottom blade. There are of course other reasons for backlapping – such as the requirement on reels which are 'single blade' ground rather than being cylindrically ground – the 'single blade' grind method being less capable of producing an absolutely cylindrical reel.

■ **Single Point Bottom Blade Adjustment:** In some US cutting units the bottom blade is adjusted up to the reel by using a single adjusting mechanism attached to the bottom block at the centre of the unit. In this system it is absolutely essential that alignment of the reel and bottom blade is perfect, as there is no means to twist the bottom block to compensate for any degree of misalignment. Frequent backlapping to ensure perfect match of reel and bottom blade is therefore essential.

■ **Bottom Blade Position:** The relationship between the bottom blade and turf changes as adjustment is made to compensate for wear of the bottom blade and reel blades. A situation can therefore ultimately arise where the rear of the bottom blade and the bottom block are closer to the turf than the front cutting edge. This results in more drag on the turf, with an increased tendency for the cutting unit to 'ride on' any matt or thatch rather than cutting down into it, due to the increased contact area between bottom blade and turf.

The overall area of contact between cutting unit and turf can of course be reduced by other factors, such as the use of grooved front rollers, which certainly assist in the units ability to cut down into the matt, but it is again interesting to note that the use of grooved rollers is far more prevalent in the USA. This is no doubt partially due to 'climatic' and turf conditions which result in the rapid accumulation of thatch, but I suggest also that cutting edge unit design concepts have contributed toward this requirement.

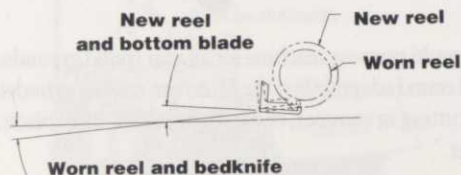

● **Brian E Mitchell is General Manager Engineering, Ransomes Sims & Jefferies Ltd.**

## Conclusions

The above is obviously biased toward the European tradition of adjusting the cutting reel down onto the bottom blade. However, I have attempted to take an unbiased stand but find it hard to reveal any valid technical reason which favours a change to this long accepted method.

### Benefits of Adjusting Reel to Bottom Blade

- Bottom block is used as structural member of cutting unit frame contributing significantly to frame strength and rigidity.
- A consistent minimum cutting height is retained during the total life of reel and bottom blade.
- Any misalignment between reel and bottom blade can easily be compensated for by 'unequal' adjustment of reel without inducing twisting forces into any component. Backlapping is then unnecessary for correcting misalignment. (Backlapping only required to maintain keen cutting edges).
- The angle between bottom blade and turf is constant and can therefore be designed for an optimum position to minimise drag on the turf and to present a small area of surface contact with the turf to ensure that the unit will cut down into the thatch or matt, rather than riding over it.
- Reducing need for grooved front rollers, although these still are an advantage. They should not, however, be used indiscriminately. Scuffing of fine turf when turning is more likely with a grooved front roller.

# ALLEN QUALITY SUZUKI POWER - A WINNING COMBINATION

FIRST PAST THE POST PERFORMANCE  
WITH THE POWERFUL 120cc ENGINE

Allen Hover Mowers are tough, rugged no-nonsense machines especially suited to the rigorous mowing role demanded by the professional user.

The 218Si is powered by the renowned M120X 2-Stroke Suzuki engine which provides the Japanese features of high quality, easy starting and smooth running. Pointless ignition for easy starting means low maintenance!

This unique 18" hover mower with the performance-proven 3.7hp engine has already become very popular with the commercial users.

Write or phone for full details today!

Allen Power Equipment Ltd, Dept G1, The Broadway, Didcot, Oxon OX11 8ES.  
Telephone (0235) 813936

The **ALLEN**  
*Safeway*  
Ultimate Safety Blade



Already proven in professional use, the Allen Safeway Mowing System is the ultimate in safety blades. It uses the unique nylon line cutting principle first developed by Allen - putting safety first. **Grass cutting has never been this safe!**

Allen Equipment Ltd, Dept G1, The Broadway, Didcot, Oxon OX11 8ES. Please send Allen 218Si details

Name \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_

Telephone \_\_\_\_\_

Tick if demonstration required  G1.10.91



AD REF 126

# Built by the Swiss...

Now there's a new multi purpose machine for all year round grounds care - the Bucher Multi. Built by the Swiss for all round adaptability, the Multi can take on cylinder, rotary or flail mowers for fast productive cutting in summer, or a front brush, or snow blade for cleaning up in winter.

Now, when you're looking for a machine that works like clockwork all year round, take a good look at the Bucher Multi - there's no machine more adaptable to your demands for all year round productivity and time saving potential.



**BUCHER**

To: Bucher Marketing, P.O. Box 344, Malmesbury, Wiltshire SN16 0QD. G1.10.91

Name \_\_\_\_\_  
Job Function \_\_\_\_\_  
Address \_\_\_\_\_  
Post Code \_\_\_\_\_

# ..works like clockwork.



AD REF 223

# UPHILL Struggle



The most unplanned events – such as going out of control on steep banks and slopes – should never be entirely unexpected, warns HUGH TILLEY. Act like a boy scout – and be prepared for the hazards

**S**lopes and banks are synonymous with landscaping, yet these features cause the greenkeeper many mowing problems. While some banks are obviously essential to level a tee or green etc., some slopes can be reduced in angle to allow easier and safer mechanical maintenance. Grass is a notoriously treacherous surface, particularly when damp, and many smaller and steeper slopes are currently mowed by hand with a hover mower on a rope – a somewhat hazardous operation.

However there are a number of specialised pedestrian mowers with exceptional stability and suitable drive which are able to tackle most slopes, although greater selectivity is needed if reel mowing is required. Over larger areas four wheel drive ride-ons and tractors will safely tackle relatively steep slopes, though extreme caution is needed in certain weather conditions, with certain tyres or without adequate braking. Conventional two-wheel drive provides least ability on slopes and 'ability' is most variable according to vehicle configuration and balance: a rear steer ride-on mower should be safer mowing downhill than a front steer tractor with trailed gangs – depending on the tyres.


'Steep' is often a subjective judgment by the greenkeeper, perhaps depending upon the terrain he is used to, thus it is important to define measurement of slope. There are three systems in common use; one being angle, i.e. 11 degrees, whilst two use ratio of vertical to horizontal as linear measurement (the old 'road' style), such as 1:5 or (new Department of Transport style) as a percentage where 1:1 is called 100%, i.e. 12 degrees = 1:5 = 20%. In this feature I shall use linear ratio (such as 1:5) mainly because it is easiest to measure – with a spirit level and rule/tape. Measuring some typical slopes on your course is extremely helpful as this will give some figures with which you can relate.

Most tractors and many ride-ons have roll-over protection, ROPS, however most slopes and banks have a run out at the bottom so loss of control seldom results in more than skid marks on the turf. ➔ 11


## HUXLEYS All-season turf maintenance




HU84 Multi-Depth  
Aerator



358  
Greensmower



TR84 Hydraulic  
Reelmower

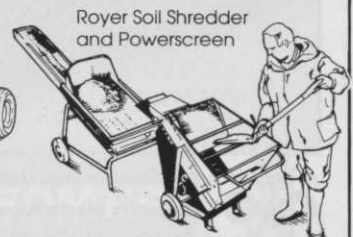

Royer Soil Shredder  
and Powerscreen

Please call us for illustrated literature on our full product range and a no-obligation demonstration on your ground.




Huxleys Grass Machinery  
The Dean, New Alresford,  
Hampshire SO24 9BL  
Tel: 0962 733222 Fax: 0962 734702

AD  
REF  
60



T H E N E W G T R A N G E

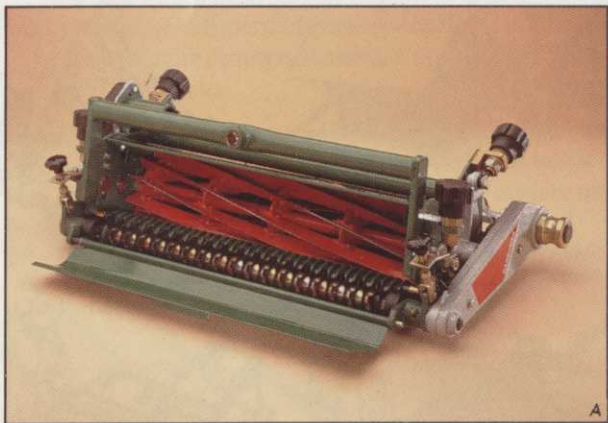

A The micro-precision Greens Unit with Verti-Groom attachment.

B The GT Champion's electronic control panel.

C 3-way adjustable seat with flip-up armrests



It takes years to perfect the greenkeeper's art.

But you can still pick up a few useful pointers in a week. Particularly if you spend it at the wheel of a new Ransomes GT.

If you'd like to try it, you only have to ask.

Choose the GT Champion, with its second-generation electronics, or the GT Classic, with simple but effective hydraulic controls.

See for yourself the perfectly-groomed finish achieved

THERE'S NO SHORT CUT TO PERFECT GROOMING



by the 9-blade Greens Units, with their Verti-Groom attachments to control lateral growth and thatch.

And try for size the superb new driver's seat: generously upholstered, fitted with flip-up arm-rests, and adjustable every which way.

For all the details of both machines (and a week's loan of one)

simply ring Trevor Knight at

Ransomes, or return the

coupon. And see how, just for

once, you can take a short cut to perfection.



Please send me full details of the new Ransomes GT range, and ask my local dealer to contact me to arrange a week's trial without obligation.

Name: \_\_\_\_\_

Position: \_\_\_\_\_

Club: \_\_\_\_\_

Address: \_\_\_\_\_

GI.10.91

Ransomes Sims & Jefferies Limited  
Ransomes Way, Ipswich, England IP3 9QG  
Tel: (0473) 270000 Telex: 98174 Fax: (0473) 270032



BY APPOINTMENT  
TO HER MAJESTY THE QUEEN  
MANUFACTURERS OF  
HORTICULTURAL MACHINERY  
RANSOMES SIMS & JEFFERIES LTD  
IPSWICH

**RANSOMES**




**(WELL, ONLY ONE.)**

AD  
REF  
9



# Peace

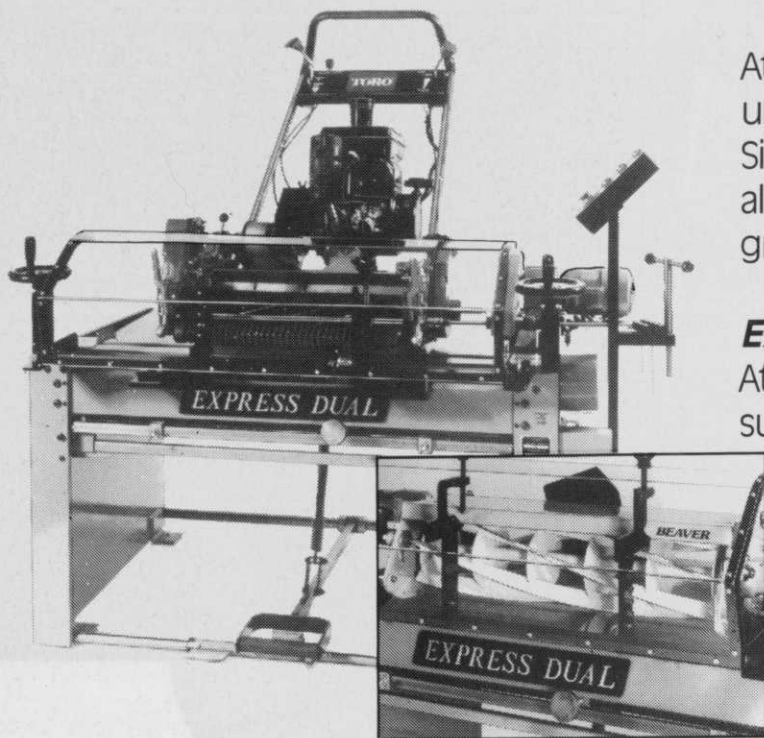

The reliability and accuracy of an Atterton Grinder is unrivalled, even under the most arduous conditions. Simple to use, an Atterton Grinder allows the operator to precision grind every time.


Models include the proven **Express Dual**—an innovation from Atterton & Ellis. The first and highly successful "in-situ" grinder that will accurately sharpen cylinders still fitted to the mowing machine or, alternatively, cylinders may be removed for

a full strip down during the less busy periods and sharpened just as accurately.

The "**Master**", a giant among Grinders – built to a standard that others try to follow and capable of grinding larger cylinders on gang mowers.

Bottom blade grinders include the **Anglemaster** – a precision grinder that complements both The **Master** and The **Express Dual**.

**Professional Grinders for Professional People – from the people who have been grinding for over 100 years.**

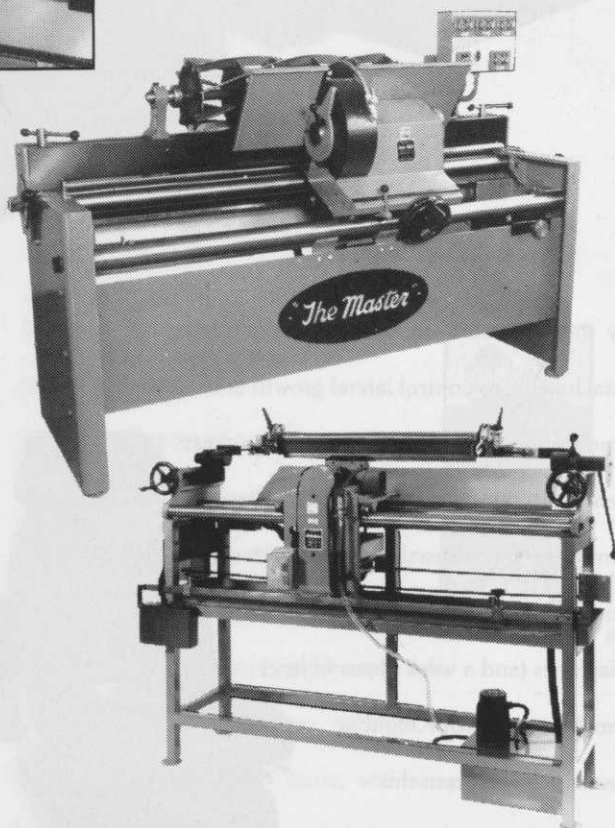

# of mind



**ATTERTON & ELLIS LTD**

Manufacturers of Fine Grinders for over 100 years

Iron Works, Haverhill, Suffolk CB9 8QH.

Tel: (0440) 702312 Fax: (0440) 712138