

Water Quality Management

BY JOHN FOY, DIRECTOR

USGA GREEN SECTION

On our planet, water makes up over two-thirds of the entire surface area. It is also a basic requirement for survival of all life forms. Water bodies and wetlands are found on virtually every golf course in Florida.



John Foy

Protecting surface and ground-water quality should be a goal and an integral part of course management. To insure that your golf course is maintaining good water quality, it is important to have a strategy in place to monitor water quality, improve conditions if warranted and deal with any problems that may arise.

Water quality management will be the focus of this sixth and final article in this ACSP series. To achieve certification in this category, you

need to consider the following things:

(1) **Baseline Data and Water Quality Monitoring:** What baseline information has been established for water quality, including clarity, dissolved oxygen, and pH? What water sources are tested? Who conducts the tests and how often are they carried out?

(2) **Streams:** If a stream or creek is on the property, what stream protection measures are in place to reduce erosion, maintain adequate shading, and reduce pollution inputs? Has anyone sampled for "macroinvertebrates" (insect larva and

To insure that your golf course is maintaining good water quality, it is important to have a strategy in place to monitor water quality, improve conditions if warranted and deal with any problems that may arise.

ACSP: Part VI

In this final Part 6 of this series on the Audubon Cooperative Sanctuary Program for Golf Courses, methods of *Water Quality Management* are presented.

- ✓ Environmental Planning
- ✓ Member/Public Involvement
- ✓ Wildlife & Habitat Management
- ✓ Water Conservation
- ✓ Integrated Pest Management
- ✓ **Water Quality Management**

other organisms that lack a backbone)? Since many of these organisms are sensitive to pollution, they are a highly reliable indicator of pollution.

(3) **Wetlands:** If wetlands are present, what condition are they in (degraded? viable & productive? invaded by phragmites or purple loosestrife? protected?) What measures are taken to protect or improve wetland habitat?

(4) **Buffers and "No Spray" Zones:** Vegetative buffers around water features help to filter runoff and reduce erosion. Have you established buffers and "no spray" zones near water sources to minimize potential drift and runoff?

(5) **Drainage:** What areas drain to lakes, ponds or wetlands? What filtering mechanisms are present? If fertilizers are getting into lakes, that can be a major cause of algae problems.

(6) **Chemical Additives:** What (if any) chemicals have been added to water features? Have you made any changes in chemical management of water features? Have you tried alternatives such as biological remediation or aquatic planting? Is wildlife abundant or scarce?

(7) **Maintenance Buildings:** The maintenance area can be a potential source of contaminated runoff. Are all buildings safe and up to code? Are there repairs that need to be made? If someone came to inspect your facility, would they come away confident or wary about your management practices?

As an additional note on water quality management, research conducted by the USGA on the environmental impacts of golf courses revealed that when fertilizers and pesticides are used properly, the potential for leaching of these materials into ground water is minimal. However, this research revealed that minimizing runoff into surface water is an area that needs greater attention.

The creation of buffer strips and no spray zones should be pursued at all facilities. Although a vegetation buffer surround-

Water quality affects virtually every golf course

ing all sides of a water body would provide the best nutrient filter, this is usually not an acceptable situation when an area comes into play. Maintaining a higher height of cut turf buffer strip or grassed swale for those areas in play is a reasonable compromise that can also help minimize maintenance requirements. For the out-of-play areas of lakes or ponds, border shrubs and emergent plants should be established and maintained.

Ideally, "no-spray" zones approximately 50-foot wide should be enforced

around all surface water bodies. However, adhering to this ideal is not always feasible on a golf course. When fertilizer applications must be made immediately adjacent to a water body, the use of drop spreaders is recommended.

Also, only slow release nitrogen sources and no more than 0.5 lbs. of actual nitrogen per 1,000 square feet should be applied at a time in sensitive areas. If an unacceptable level of pest activity develops in a "no spray" zone, naturally the first route to pursue would

be the use of biological control agents. If a pesticide must be used in these areas, it should only be applied as a spot treatment.

Also, the chemical characteristics of the pesticide options should be carefully considered in selection of the material to use in these locations.

The Jan/Feb, 1995 issue of the *Green Section Record* contains a listing of commonly used pesticides and their characteristics.

Water management by design

BY STEVE EHRBAR, CGCS

OLD MARSH GOLF CLUB

Old Marsh Golf Club was built on a unique 460 acres of land. Architect Pete Dye routed many of the holes around protected wetlands and his design for the irrigation and drainage systems were very well thought out.

The irrigation system was installed with many different sized heads and half circles to ensure no irrigation water would be thrown into the wetlands or created marshes.

The drainage system on the course has approximately 30 catch basins per hole. All the excessive runoff water from rain or irrigation is collected by these basins and run through a series of pipes to containment lakes. From these containment lakes, the water is pumped to the main irrigation lake for reuse.

One design feature that each hole has is that all the perimeters of the fairways and roughs are built higher than the middle of the fairways to ensure no fertilizer or pesticides contaminate the wetlands. We are very selective on our use of products, and try to be environmentally conscious.



Pete Dye manages water at Old Marsh with unique design features.
Photo courtesy USGA Green Section.

Grassing for Water Quality



Canal at the Hole in the Wall Club before restoration project.

BY FRED YARRINGTON

Note: Fred Yarrington is an ACSP Resource Committee Member for the Hole In The Wall Golf Club, Naples

At Hole in the Wall Golf Club, we have approximately 10 acres of land in 4 or 5 areas which are out of play. Most of these areas are adjacent to native vegetation areas or bodies of water.

Our long-range goal is to environmentally restore all of these areas, which are currently mowed on a regular basis, and eventually have a low maintenance area of natural vegetation.

The project started in 1987, when we decided something had to be done about the algae in the canals (*see photo above*). We were told we needed to deepen the canal in order to control the

On Course, With The Proper Balance.

AmerAquatic keeps water environments in balance... clean, healthy and attractive. Our unique "spot treatment" method solves small problems before they develop into big ones. Trust our technicians--experienced, state-certified professionals--to manage your lakes safely and effectively. On course with the proper balance. For algae and weed control, fish stocking, aeration, lakescaping, mitigation, lake design and more, call AmerAquatic. *Your lake's best friend.*

FLORIDA • GEORGIA • CAROLINAS 800-432-1349

AmerAquatic™ *Your lake's best friend.*SM

GRASSING FOR WATER QUALITY

First Phase: *Deepening the canal*



algae problem (See photo, above). In December, 1994, we selected a one-acre area, approximately 1,000 feet long, adjacent to a drainage canal. This "trial" area was planted with cord grass on 3-foot centers, and we also added aquatic plantings in the canal.


The plantings are six months old and are slowly growing in. We would have preferred a more dense planting, but selected the 3-foot centers for cost reasons. The trade off is that more weeding is required in the interim until the grass grows dense enough to inhibit weed growth.

GOLF MAINTENANCE BUDGET BLUES?

Are your Spray Pattern Indicators costing too much money?

Switch to **SIGNAL™** and \$ave money!!

Get more color for your Spray Pattern Indicator Dollars - use **SIGNAL.**

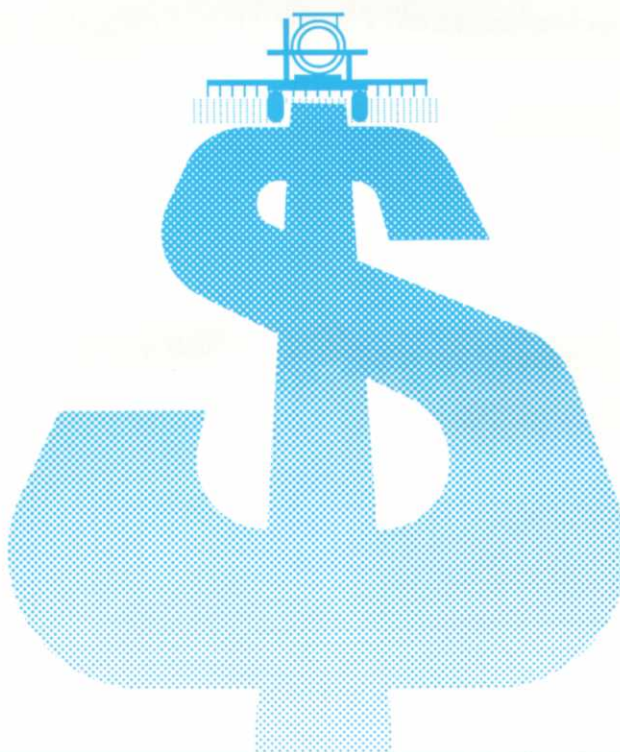

SIGNAL distributors:

GOLD KIST, INC.

Bradenton, Robert Giehls
813-730-2308

Gulf Breeze, Nelson Murdock
904-934-1707

Chuluota, Roger Widrig
407-365-7076

Cairo, Mike Bishop
912-377-8306

HARRELL'S, INC.

Lake Wales, Bill Fowler
813-325-6904

Lakeland, Dick Harrell
813-660-5989

Dunedin, Joe Clay
813-660-5988

W. Palm Beach, Bill Rayside
407-371-2544

Vero Beach, Matt Shook
407-563-7488

Lake Worth, Butch Singo
407-399-2242


PRECISION
LABORATORIES INCORPORATED
800-323-6280

May, 1995:
*After the cordgrass
and aquatic
plantings.*



We no longer have a problem keeping the canal clean in this planted area. During construction to deepen the canals, we inserted a weir near the 17th green which enables us to control water levels and flow through the canal. Therefore, we are able to keep the water level in the canal much higher than we were before this project.

Our membership has been very supportive of this project. We got the idea and source of the cord grass from Collier's Reserve Country Club. I believe a key to success in the Audubon Cooperative Sanctuary Program is the sharing of ideas and information.



COMPUTER-EXACT CUSTOM MIXES.
EVERY ORDER. EVERY TIME.

Every order received by **Golf Agronomics** is prepared in our fully computerized machine. Double screening capabilities ensure that your first mix portion is the same as your last.

Golf Agronomics meets all your top dressing needs with its ability to customize your mix with a variety of soil

amendments including: **Dolomite, Hi-Cal, Wetting Agents, Charcoal, Humic Acid, Minor Elements, Rock Phosphate, Gypsum.**

Golf Agronomics donates a % of every ton of top dressing sold to the FGCSA. Since its opening, **Golf Agronomics** has donated in excess of \$11,000. Our sincere thanks to all of our customers.

**Golf
Agronomics
Supply &
Handling**

G.A.S.H.

(800) 626-1359
(813) 955-4690 Fax
P.O. Box 3455
Boynton Beach, FL 33424



One of three removable sumps on the wash pad

Water quality management for the equipment wash area

BY DARREN DAVIS
GOLF COURSE SUPERINTENDENT
OLDE FLORIDA GOLF CLUB

The equipment wash area has become a hot topic in recent years. Most superintendents' management styles are slightly different, but I believe we all want the same outcome, an environmentally conscious equipment wash area that functions up to our standards.

A couple of years ago, it seemed everyone was jumping on the band wagon and buying water recycling units. The recycling units were supposed to filter all contaminants from the water and recycle the water for reuse. The feeling was that the units were going to be the wave of the future, and someday they might be.

However, it seems that people are currently shying away from these units because of the horror stories that are being told by some of the original purchasers, not to mention the cost. I was told by one equipment technician that he spends one-third of this time working on their recycling unit. I also know of a golf course that bought a unit three years ago, and it has still never worked to this day.

I contemplated the purchase of one

when I was designing our maintenance facility. I did not buy one, and with a few minor exceptions, I am very happy with the system we are using at Olde Florida. I am sure that this system would not work for everyone, but it is an option.

Goals

My goals of the equipment wash area are simple:

To be located in a convenient area that coincides with the desired flow of traffic.

The area to be large enough so that at least three pieces of equipment can be cleaned at once.

The quality of water used to clean equipment be free of any damaging compounds that might cause premature corrosion or deterioration of the equipment.

The availability of compressed air for use on electrical components or other needed parts of the equipment.

Complete capture of any clippings/solids.

Complete capture of any petroleum products (by using an oil/water

separator or a similar baffle system).

A pleasant area to clean the equipment, with little or no unpleasant odor.

The Pad

The concrete pad at Olde Florida measures 20-feet by 40-feet. The sides and back also have a 5-inch poured concrete curb to prevent water and/or debris from leaving the area. Along with the wash pad, a concrete ramp should be poured leading on to the wash area so that water and debris are not channeled on to the pad from the surrounding area.

The concrete pad is sealed with a silicone, acrylic concrete stain. It is very important to use this or a similar concrete stain, and follow the directions completely. If you do not, you will most likely be dissatisfied with the longevity of the coating.

Before applying the stain, the concrete should be at least 45 days old, clean, dry and free of paint and grease.

For best results, the concrete should be etched with one part muriatic acid and two parts water. The solution can be mixed in a plastic sprinkler can. The area

should be thoroughly and evenly wet with the solution. Then rinse the area with clean water after 20 minutes. The concrete should then be allowed to dry for at least 24 hours before applying the stain.

For the first two coats, one gallon of concrete stain should be mixed with one to two quarts of solvent. The third coat (and fourth if needed) should be straight concrete stain. The final step is simple, stay off the area for at least 72 hours.

Why seal the concrete? I can think of several reasons. One, the area is aesthetically more pleasing (it looks cleaner). Don't laugh until you think about this. If an inspector (DER, EPA, etc.) came to your facility, I think you would agree that the cleanliness of this area will most likely have an impact on his decision whether to investigate the area further.

I also strongly believe that a clean maintenance facility results in better work habits among the staff. In addition, a clean, organized maintenance facility will provide a more positive feeling by the membership towards the money they are spending for the maintenance of the golf course.

Another reason to seal the concrete is since concrete is semi-permeable, the concrete stain/sealer will not allow petroleum products to penetrate. The grease spots can then be wiped off with a reusable shop rag and a cleaner.

The pad is formed so that the entire area slopes to one of three concrete sumps. The sumps are 1-foot by 1-foot by 2-foot deep. The sumps have a recessed lip so the aluminum grate that covers the sump rests flush with the concrete pad. Inside the sumps are removable stainless steel baskets that catch the solids that enter the sump.

One side of the basket has a stainless steel grate so clippings are contained, and the water flows unobstructed through the baskets. These baskets are removed daily, excess water is allowed to drain out of them, and the clippings are emptied into a utility vehicle to be disposed of on property.

Separation Tank

Once the water leaves the three sumps, it travels through a 4-inch pipe into a 1,200-gallon concrete tank. The tank is a

septic tank that was modified for Olde Florida. It is divided into three chambers by using two concrete divider walls.

The first wall extends from the very bottom of the tank upward to a height slightly below the intake pipe. The object of the first chamber is to contain all solids that might escape the catch baskets in the sumps.

The first chamber periodically must be cleaned. To dispose of this material, our loader/backhoe is used to carefully scoop out this material. This material is then transported by a utility vehicle to a site on property and either spread out, or used to fill in a hole. Experience has shown the need to clean this chamber approximately every 9 months.

**AQUATROLS INVENTED
SOIL WETTING AGENTS 40 YEARS AGO!**
We felt it was time
to offer the turf industry something new...
A CHOICE!



Call 1-800-257-7797
for information on Aquatrols' three
unique chemistries that provide
solutions for your soil-water
management problems.

AQUATROLS
Making Water Work Efficiently
5 North Olney Avenue
Cherry Hill, NJ 08003 USA
1-609-751-0309 • 1-800-257-7797
FAX: 1-609-751-3859



Left, a 40 x 20 ft. wash area with multiple air and water stations. In photo below, the sumps are emptied daily and the collected solids are spread on the course.

The second chamber that is formed between the two walls functions as an oil/water separator. The second wall extends from the top of the tank and does not extend the full distance to the bottom. Therefore, it creates a chamber that would contain oil, since oil will always float on water. The water then flows under the second wall into the third chamber.

The third chamber should have clean water in it always. However, to be extra cautious, we extended the exit pipe down from the top so that the water is forced up from the bottom of the tank. Therefore, in theory, it would be impossible for any soil to escape the tank.

Since the tank is installed level, it remains full of water. Because the exit pipe is lower than the entrance pipe, hydraulics force the water through the system (not gravitational flow). This is important since the second chamber is used as an oil/water separator. If the water level would fluctuate, the oil that might be in this area, could in theory escape under the second wall.

The lid of the tank must be removable so that at least solids contained in the first chamber can be removed. At the same time, the lid must be secure enough so it makes a seal to the second wall. This will ensure the second chamber retains all potential oil that might enter the system.

The water that leaves this tank then filters through a long retention swale that contains a healthy stand of wetland plants (duck potato). The water is then retained on-site in the irrigation pond.

Other features

When designing the maintenance facility, we provided numerous blank conduits under the surrounding pavement for future use. In particular, two were provided to the equipment wash area so that compressed air hoses could be run through the conduits for use at the equipment wash area.

Using air to assist in the cleaning of the equipment has been extremely beneficial. The air allows us to clean sensitive areas of the equipment, such as electrical components, without the fear of causing

damage.

Using compressed air to clean the engine also will help extend the life of the machine. Severe damage could occur if cold water was constantly used to wash a hot engine. Also, if large deposits of clippings have accumulated on a machine, air can speed up the cleaning process by dispersing the clippings before using water. (If compressed air is supplied for operator use at the equipment wash area, be sure that signs are posted requiring that eye protection be worn.)

The wash pit is equipped with three



High-pressure water can invade seals and bearings causing damage and extra work for the mechanic staff

separate water outlets. The three outlets are equipped with a 1-inch hose. Using a 1-inch hose provides us with a high volume, low pressure water supply.

There are several advantages of using a high-volume, low-pressure water supply. First, the time it takes to clean the equipment is reduced. Second, the potential damage to an operation, or the painted surface of the equipment, is less than if a high pressure system was used. Finally, high-pressure water can invade seals and bearings causing damage and extra work for the mechanic staff.

One feature that I would definitely like to have, and would advise anyone considering a system like this to include, is a roof over the pad where the equipment is washed.

The roof would serve two purposes. First, it would create a more pleasant area for the operators to clean the equipment. The operators would most likely pay closer attention to the quality of job that they are performing, rather than rushing to get out of the sun.

Second, the roof would keep the operators dry so that they can clean the equipment in the rain. (The roof should have lightning protection on it for employee safety.) The roof would also keep heavy rains from forcing unnecessary water through the separation tank.

The final point I would like to make is that this system is not for use as a mix/load site or sprayer cleaning area. That should be a separate area, also with a method of containment. The water that

is emitted in mix/load operations should not be discharged, rather it is preferred that this water be recycled as a tank rinse or some other means of disposal on a turf area.

Conclusion

I am not inferring that the system we designed at Olde Florida is the only way to design an equipment wash area. What

works well for us might not work for you. Many people are trying to predict what the future local, state, and federal regulations are going to be. However, I feel that as professional turf managers, we should not simply ignore the problem. Rather, it is our duty to make the most environmentally, financial, and functional decision for our individual situation.

If You're Looking for Improved Pest Control . . . Du Cor has an Easier Solution!



New Du Cor LEMWET can help improve your pesticide spray application! LEMWET is a lemon extract attractant and surfactant for use with most pesticides. LEMWET attracts nearby pests to your spray. In addition, it's non-ionic surfactants improve spray penetration and bring your pesticide into close contact with pests!

For over 35 years, Du Cor has been coming up with products to fit our customers needs. From liquid micronutrients, humates and fertilizers, to specialty dyes, surfactants, odor counteractants and more, we take pride in finding special solutions that help our clients.

So if your looking for something special to attract a nuisance, or maybe just a different solution to help you grow, give Du Cor a call. We may already have just the solution you need!



Du Cor International Corporation

P.O. Box 593298, Orlando, Florida 32859
407-859-4390 or Toll Free 1-800-382-6735

Water Management at Golf Courses – Algae and Macrophytes

DR. MILES M. (BUD) SMART
PRINCIPAL ENVIRONMENTAL SCIENTIST
THE TURF SCIENCE GROUP, INC.
CARY, NC

DR. CHARLES H. PEACOCK
PROFESSOR CROP SCIENCE
NORTH CAROLINA STATE UNIVERSITY
RALEIGH, NC

Water management on a golf course is one of the significant keys to the success of course management. Properly managed water resources provide good quality irrigation water, aesthetically pleasing ponds and streams, appropriate stormwater treatment, and no offsite surface or ground water pollution problems.

Improperly or poorly managed water resources can cause great problems for the golf course; for example, poor quality irrigation water may injure or even kill greens, while pond algal blooms can cause aesthetic and odor problems. Understanding the ecology of aquatic plants, algae and macrophytes, as an important component of the golf course water resources is paramount to making certain they only positively impact the golf course environment.

Incorporation of aquatic management

Algae are particularly well adapted to take advantage of high nutrient concentrations (particularly phosphorus), warm water, and sunshine as they reproduce in exponential fashion.

strategies should be part of the courses overall environmental management program (Peacock and Smart 1995).

1.0 Algae and Aquatic Macrophytes. Aquatic algae are plants generally classified as either attached (periphyton) or free-floating (phytoplankton). Attached aquatic macrophytes are generally classified by their growth form - floating, emergent, and submergent. Each water body has algae and aquatic macrophytes that occur naturally.

Aquatic plants are an important component of the ecosystem. Like other plants they produce food through photosynthesis and are thus the base of the aquatic food chain, and they provide cover for animals. The algal community is comprised of many different types of algae that may change throughout the growing season. Some of the common groups include blue-green algae, green algae, dia-

Table 1. Mean and range of nutrient and chlorophyll concentrations associated with various water quality conditions (Modified from R.G. Wetzel, 1983).

Nutrient	Pristine Water (Oligotrophic)	Moderately Enriched (Mesotrophic)	Enriched (Eutrophic)	Highly Enriched (Hyper-eutrophic)
Total Phosphorus ($\mu\text{g/L}$ or ppb)	8.0 3.0-17.7	26.7 10.9-95.6	84.4 16-386	750-1200
Total Nitrogen ($\mu\text{g/L}$ or ppb)	661 301-1630	753 361-1387	1875 393-6100	— ^a
Chlorophyll a ($\mu\text{g/L}$ or ppb)	1.7 0.3-4.5	4.7 3-11	14.3 3-78	100-150

^a No Data

toms, dinoflagellates, and euglena. The body shapes of algae are highly varied and include unicellular, multicellular, colonial, and filamentous.

The distribution and abundance of algae and macrophytes in a water body is subject to considerable spatial and temporal variation. Among the many factors that determine their presence, distribution and density are light, temperature, water turbidity, water currents, hydraulic residence time, nutrient concentrations, nutrient loading from watersheds, water chemistry, water depth, sediment quality, herbivore grazing, and human activities. Aquatic sites are thus dynamic and responsive and as the availability and nature of the resources change, so will the species diversity and/or amounts of aquatic vegetation. However, at some point a healthy algal or macrophyte population may actually become an "algal

The result is an algal bloom, often distinguished by the "pea-soup" appearance of water that results from large quantities of algae.

bloom" or "weed infestation" that may impair the usefulness of a water body for its intended uses.


2.0 Aquatic Algae and Algal Blooms.

Although many factors influence the abundance of algae, algal blooms are most often associated with an increase in nutrients (primarily phosphorus and nitrogen) in the water. Through much research, phosphorus was identified as the critical element in causing algal blooms in water bodies (Vollenweider, 1971; Jones and Bachmann, 1976; Wetzel, 1983). Phosphorus is therefore generally considered the limiting nutrient in freshwater ecosystems; that is, phosphorus is a required nutrient for plant growth that is most often in short supply.

Algae are particularly well adapted to

THE SOIL RELIEVER

A Soil Aerator For The 90's And Beyond.....

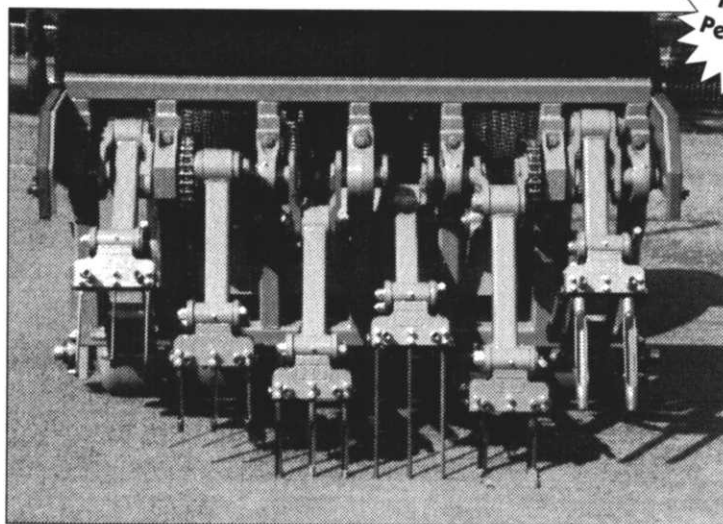

- YES** – The Soil Reliever is a deep tine aerifier!
- YES** – The Soil Reliever can be used for any aerification task!
- YES** – The Soil Reliever will fit most tractors!
- YES** – The Soil Reliever is made in the U.S.A.!
- YES** – The Soil Reliever is built to last!
- YES** – The Soil Reliever is practically maintenance free!
- YES** – The Soil Reliever is proven!
- YES** – The Soil Reliever will give you a greater dollar value over all other types of aerifiers!

**BEFORE YOU BUY ANY AERIFIER –
LOOK AT THE SOIL RELIEVER &
COMPARE!**

Free Brochures and/or Video!

Financing and Contract Service Available

Turf Specialties, Inc.

Thomas St. Romain
1-800-752-5189
Florida Distributor

TURF
SPECIALTIES, INC.

Table 2.

Effectiveness of herbicides for aquatic plant control in irrigation watersupplies (Langeland, 1994).
Effectiveness of control is as follows: * = Not recommended; F = Fair; G = Good; E=Excellent

Aquatic Plant	Diquat	2,4-D	Copper	Fluridone	Glyphosate
Floating Plants					
Duckweed	G	F	*	E	*
Watermeal	*	*	*	G	*
Alligatorweed	*	F	*	F	G
Submersed Plants					
Bladderwort	G	F	*	G	*
Brazilian elodea	E	*	F	G	*
Coontail	E	F	*	E	*
Hydrilla	E	*	F	E	*
Parrotsfeather	G	*	*	F	*
Pondweed	G	*	*	F	*
Slender naiad	E	*	*	E	*
Southern naiad	E	*	*	G	*
Spikerush	*	*	*	G	*
Variable leaf milfoil	G	E	*	G	*
Emersed Plants					
American lotus	*	G	*	G	G
Cattail	G	F	*	F	E
Fragrant waterlily	*	G	*	G	E
Rush	*	F	*	*	G
Spadderdock	*	F	*	G	E
Waterpennywort	F	G	*	*	E
Filamentous Algae	G	*	G	*	*

take advantage of high nutrient concentrations (particularly phosphorus), warm water, and sunshine as they reproduce in exponential fashion. The result is an algal bloom, often distinguished by the “pea-soup” appearance of water that results from large quantities of algae. Concentrations of nutrients and chlorophyll a associated with different levels of water

quality are given in Table 1 (Page 74). Chlorophyll a is used as a measure of the algal biomass in water.

Algal blooms cause many different problems. Two of the primary concerns on golf courses are aesthetics (looks bad and smells when they die) and die-off (die-off is when most of the algae die at nearly the same time). Die-off occurs for

many different environmental reasons (overcast skies reducing light intensities and a cold snap are among the two most common) and may also occur when chemicals are applied for algal control. A die-off is easily observed - one day the water is green, and the next day the water is brown. The intense green of the algal bloom is from the chlorophyll in the

Table 3.

Waiting period in days before using water after application of herbicides for aquatic plant control.

Common name	Irrigation	Fish Consumption	Swimming
Copper Compounds	NR*	NR	NR
2,4-D	+	+	+
Diquat	14	NR	NR
Fluridone **	7-30	NR	NR
Glyphosate	NR	NR	NR

* NR = No Restrictions

** See label for specific information.

+ Water use restrictions vary by formulation and manufacturer. In general, if water is used for irrigating sensitive plants, 2, 4-D should not be used.

algae. The mass die-off of algae places a large oxygen demand on the water; that is, large amounts of dissolved oxygen are required to decompose the dead algae.

If oxygen demand is large enough, dissolved oxygen concentrations can fall to levels that cause changes in the biological and chemical characteristics of the water body.

Four mg/l of dissolved oxygen is generally the minimal amount of oxygen that is desirable for maintenance of aquatic life. Thus, if dissolved oxygen levels fall below this level aquatic biota may die (e.g., a fish kill may occur). In many states, 4.0 mg/l is the water quality criteria for warm water fisheries and 5.0 mg/l is the criteria for cold water fisheries. It is important to maintain these levels of oxygen in the water column. The lack of dissolved oxygen also sets in motion a series of chemical reactions that reduces water quality.

2.1 Prevention of Algal Blooms. The factors that control the abundance of algae, form the basis for managing them. Frequently, prevention of algal blooms requires controlling nutrient loadings to the water body. This means that sources of nutrients in the watershed or basin that have the potential of reaching the water must be controlled, or at least, reduced to the lowest quantities possible. The alternative to controlling nutrients

before they enter the water, is to undertake restoration of the water body after nutrients have reached levels great enough to cause blooms and water quality has deteriorated. Restoration is expensive and time consuming and includes not only controlling external nutrient loadings, but also internal nutrient cycling. The larger the water body, the greater the costs. Restoration generally requires years to successfully complete.

Prevention of algal blooms is the best approach to maintaining water quality, and prevention of algal blooms require reductions in nutrient supplies to the water.

Implementing Best Management Practices (BMPs) to control nutrient movement from the golf course and into surface waters is the most cost effective solution.

2.2 Controlling Algal Blooms. The best approach to maintaining water quality against algal blooms is prevention. Prevention is best because causes of algal blooms are addressed. However, in water bodies at golf courses algae must often be controlled. Controlling algae at a golf course is an ongoing effort. The presence of algae should be 'scouted' as part of the Integrated Pest Management (IPM) program at the golf course. Scouting should begin in early spring, as water is warming, and thorough records kept of the

time, location, and amount of algae observed. Obtaining and graphing water temperatures in each water body and noting when algae first appear is a simple but effective management tool. These records are a management tool and review of the records can indicate locations of problem areas on the golf course and suspected time of outbreak. Once known, BMPs can be implemented at the problem areas.

Chemical applications of copper sulfate materials are effective algicides (Table 2). Chemical treatment should begin as soon as algae are seen in the ponds. Applications are best for overall aquatic protection when they treat only approximately one-third (1/3) of a water body at a time. This is because chemical treatment resulting in algal die-off can cause oxygen to fall to very low levels and cause fish kills if treatment causes a die-off of an entire bloom. For small pond treatment, applications near the edge of the pond (approximately shore to 3 ft) are very effective control mechanisms.

3.0 Aquatic Macrophytes. Overabundant rooted or free-floating macrophytes can be a major nuisance to golf course water bodies. Macrophytes can interfere with irrigation intakes and detract from aesthetic values. They can also introduce significant quantities of nutrients and organic matter to the water, perhaps stimu-

lating algalblooms and increasing consumption of dissolved oxygen. Light and nutrients tend to be the dominant factors controlling distribution and abundance of macrophytes.

3.1 Aquatic Macrophyte Control.

Growth habit, proper identification of the plantspecies, the relative abundance, location within the lake, and age of infestation are important considerations when dealing with macrophyte control. These are important considerations because they may provide insight into the extent of the problem and how and when to proceed with control measures. Use of the site and fate of the water will determine if many of the chemical control alternatives can be considered. Time of year will determine how effective different treatment approaches will be.

There are a number of distinct strategies for aquatic weed control. These include the following:

(1) prevention - this could be a very

important consideration in the design and construction of new water bodies;

(2) mechanical - harvesting and removing, especially at critical developmental or reproductive stages could be considered;

(3) water management - such as seasonal drawdown, although this may have limited potential;

(4) chemical control - a variety of aquatic herbicides and algicides are available. However, various characteristics of these usually limit their use to specialized sites. Additionally, effects on nontarget species must be considered. Most of the limitations on chemical control are associated with the use or potential use of herbicide-exposed water;

(5) biological control - two biocontrols that directly attack or infest plants have found some success. The use of the South American alligator weed flea beetle and moths for control of alligator weed and the white amur ("grass carp"), a herbivo-

rous fish, which is very effective for submersed weeds such as hydrilla.

4.0 Chemical Control. Chemical control of aquatic algae and macrophytes can be considered for certain plant species under specific conditions. Information on the effectiveness of herbicides for aquatic weed control is included in Table 2 (Page 76). While each of the materials listed is legally labeled as an aquatic herbicide, specific restrictions may be imposed on each chemical or even by manufacturers on specific brand names. At all times, the label must be rigidly followed when using these materials. Additionally, even under specifically allowed and controlled conditions for application, restrictions on use of the water subsequent to application may apply. Examples of these restrictions are given in Table 3 (Page 78). However, additional or more specific information may be given on the product label.

Use of aquatic herbicides presents spe-

Storage Tanks from A to Z



Orchid Island G.C.

* *"Get a good, reputable tank company . . ."*

* *" . . . Knowledge and guidance ultimately saved me \$30,000."*

Scott Bell, Bent Pine G.C.

* *"First Rate. Couldn't have asked for more."*

Jack Orr, Orchid Island G.C.

- Underground Tank Removals
- Aboveground Tank Installations
- Remedial Actions
- Statewide Service

Brevard Oil Equipment, Inc.

1557 Cooling Avenue
Melbourne, Florida 32935

800-472-7670 • (407) 259-4181

"The Golf Course Specialists"

Use of aquatic herbicides presents specific questions about their impact on water quality

cific questions about their impact on water quality. These materials have been shown not to accumulate in living organism nor concentrate in the food chain (SJRWMD, 1989). Dissipation of these materials from photochemical reaction, microbial breakdown, and dilution is rapid.

The application rate of each of the herbicides used for aquatic weed control will vary depending on the amount of active ingredient required to effectively control the targeted weeds and the formulation. Lake volume is also another consideration. Applications are best when they treat only approximately one-third ($\frac{1}{3}$) of a water body at a time. For small pond treatment, applications near the edge of the pond (approximately shore to 3 ft.) are very effective control mechanisms.

With each herbicide information is available about use precautions and toxicological properties. Of primary concern is the effect of these materials on nontarget plants which may have been intentionally planted as wildlife habitat and the effect on nontarget wildlife. Effects on nontarget plants must be evaluated by a specialist in lake management who can accurately identify the vegetation and mechanism of action of the specific herbicide in question.

Each material listed in Table 2 will be discussed individually for effects on wildlife which inhabits or contact the aquatic environment. Data has been taken from the Herbicide Handbook of the Weed

Science Society of America (1989), Weed Control Manual (1992), Farm Chemicals Handbook (1995), and "Acute and Chronic Toxicity of 75 Pesticides to Various Animal Species" (Kenaga, 1979). Values are either for LD50 - the dose (quantity) of a substance that will be lethal to 50% of the organisms in a specific test situation expressed in weight of the chemical (mg) per unit of body weight (kg); or for LC50 - the concentration of a substance in water that will kill 50% of the organisms in a specific test situation.

Fluridone. At recommended application rates concentrations in the water would range from 0.08 to 0.5 ppm. This material has been shown to be nonhazardous to birds (bobwhite oral LD50 > 2000 mg/kg; bobwhite and mallard duck acute LC50 values are both > 5000 mg/kg of diet). Fish have excellent tolerance at these concentration with an LC50 of 11.7 ppm for rainbow trout, 14.3 ppm for bluegill, and 10 ppm for channel catfish. Aquatic invertebrates also exhibit tolerances above these levels with values for daphnids at 6.3 ppm and midges at 1.3 ppm. No observed effect concentrations are 0.5 ppm for catfish and 0.48 ppm for fathead minnows. Communities of phytoplankton, zooplankton, benthic invertebrate organisms, and fish are unaffected at sites treated with these formulations.

Glyphosate. At recommended application rates the concentrations in the lake water would range from 0.36 to 1.8 ppm. This material has been shown to be extremely safe to wildlife. The LD50 for bobwhite quail is > 3850 mg/kg. The tolerance levels as LC50s for aquatic species are as follows: trout, 86 ppm; bluegill, 120 ppm; Daphnia magna, 780 ppm; harlequin fish, 168 ppm. None of these organisms would be especially sensitive to this material at proper application rates.

2,4-D. At recommended application rates the concentrations in the lake water would range from 0.36 to 1.5 ppm. General toxicity to wildlife and fish indicates that at 100 ppm there would be some slight mortality for fingerling bream and largemouth bass. Toxicity to rabbits is in the range of 300 to 1000 mg/kg. Some formulations are more toxic to aquatic animals and should not be introduced into aquatic environments unless spe-

cifically recommended on the label. The concentrations which would be found in lakes treated with the proper formulation of this material would not present a toxicity concern.

Copper sulfate. Calculated concentrations of copper in the water range from 0.155 to 0.4 ppm depending on the formulation. Environmental guidelines list the hazard to fish at > 1 ppm for rainbow trout and 0.884 ppm for bluegills and > 1000 ppm for pheasant. At the recommended rates this material should not pose a problem to wildlife.

Diquat. At recommended application rates concentrations in the water would range from 0.36 to 1.5 ppm. It is known to be generally safe to wildlife and fish with the LD50 for mallards at 564 mg/kg and the LC50 for bobwhite quail at 2932 ppm, rainbow trout at > 10 ppm


The goal of the golf course should be prevention of unwanted algal blooms and infestations

and Daphnia at 7.1 ppm. Lake water concentrations at recommended rates would pose no environmental threat based on these tolerances.

Although algae and aquatic macrophytes can be controlled in an effective manner, the goal of the golf course should be prevention of unwanted algal blooms and infestations. Prevention is the most cost effective and environmentally compatible management practice. This requires the implementation of well-designed environmental management program that includes Best Management Practices and Integrated Pest Management strategies for protection of natural resources at the course.

References

- Farm Chemicals Handbook* - Electronic Pesticide Dictionary. 1995. Meister Publishing Co., Willoughby, OH.
- Herbicide Handbook of the Weed*, Science Society of America. 1989. Champaign, IL.
- Jones, J.R. and R.W. Bachmann. 1976. *Prediction of phosphorus and chlorophyll levels in Lakes*. J Water Pollution Control Federation 48:21767-2182.
- Kenaga, E.E. 1979. "Acute and chronic toxicity of 75 pesticides to various animal species." *Down to Earth*, Vol. 35, No. 2:25-31.
- Langeland, K.A. 1994. "Weed control in irrigation water supplies." In *University of Florida's Pest Control Recommendations for Turfgrass Managers*, Publication SS-ORH-004. p. 44-46. L.B. McCarty (ed.). Cooperative Extension Service, IFAS, University of Florida, Gainesville, FL
- Peacock, C.H. and M.M. Smart. 1995. "IPM, Monitoring, and Management Plans - A Mandate for the Future." *USGA Green Section Record* 33:10-14.
- SJRWMD. 1989. "Aquatic plant management" St. Johns River Water Management District, Palatka, Fla.
- Vollenweider, R.A. 1971. "Fundamentals of the eutrophication of lakes and flowing waters, with particular reference to nitrogen and phosphorus as factors in eutrophication." *Organisation for Economic Co-Operation and Development*, Paris. 159 pages, 34 figures and appendix.
- Wetzel, R.G. 1983. *Limnology*. Second edition. Saunders and Co. 763 p.

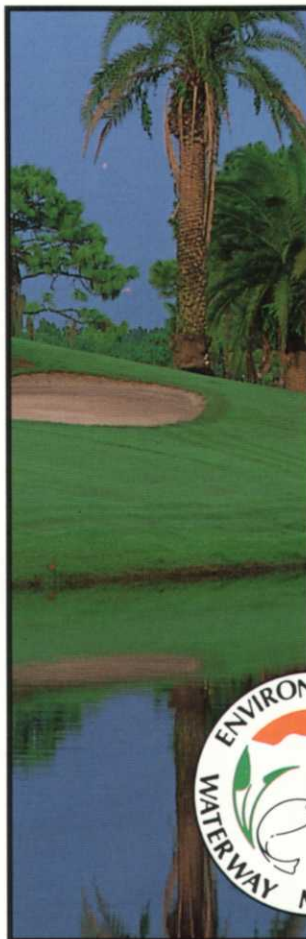

Environmental Waterway Management... "Preserving Your Liquid Assets"

Golf Courses have Lakes, Ponds, Canals and Water Everywhere! Many of these water bodies are used for irrigation, fishing swimming, drainage or simply as hazards to the navigating Golfer on your course. If you allow Algae, Grasses and other noxious weeds to grow unchecked, they will rapidly take over your precious waterways. Don't allow your waterway problems to get you in over your head. Just call the experts at Environmental Waterway Management.



THE MASTER BLEND

**HAND-IN-HAND, LIQUID AG AND IT'S VALUED CUSTOMERS
CREATE POWERFUL ALLIANCES**

BY ESTABLISHING PERSONAL PARTNERSHIPS, LIQUID AG SYSTEMS, INC. STRIVES TO DEVELOP UNIQUE, ENVIRONMENTALLY-RESPONSIBLE METHODS FOR DELIVERING PLANT NUTRITION. STAY ON THE LEADING EDGE OF ENVIRO-AGRICULTURAL TECHNOLOGY.

OUR NEW ENVIRO-PRODUCTS:

- ENVIRO-SE
- ENVIRO-ZEST
- ENVIRO-PHOS
- ENVIRO-START
- ENVIRO-RESTORE
- ENVIRO-GREEN PREMIUM FERTILIZER



Liquid Ag
Systems, inc.

OTHER VALUABLE SERVICES

- Collaboration for nutritional programs
- Soil, water and tissue sampling/analysis
- Plant nutrition products through your irrigation systems
- Irrigation water treatment
- Environmentally sensitive alternatives for reducing harsh chemical use

1010 N. W. 15th Avenue
Pompano Beach, Florida 33069
(305) 971-0022 • (800) 432-2249 • Fax: (305) 977-0031

3281 Metro Parkway
Fort Myers, Florida 33916
(813) 332-5565 • Fax (813) 332-1319