


HEAVY BRUSH/GRASS TRACK-DRIVEN MOWER, Heath International, Inc., Richmond, Mich.

Heath's J-5-T is a combination of a J-5 track-driven vehicle made by Bombardier, Ltd., Valcourt, Quebec; newly designed universal three-point free floating hitch (patent pending); a hydraulically driven Bush-Hog mower, and a hydraulically actuated front piling blade that also serves as a counter weight for greater stability. Cutting speeds range from 1 to 12 mph (5-ft. path). Top speed is about 20 mph. Second operating configuration, the J-5-T Fire Fighter, utilizes the SIECO plow to establish 10-ft. fire lanes at speeds up to 15 mph. For more details, circle (701) on the reply card.



BRUSH TO LAWN MOWER, Roof Manufacturing Co., Pontiac,

Roof's VP-75 is called an extremely simple, tough, totally rel single-belt machine with excellent cutting versatility. For cle brush and timber, the unit can be equipped with a 20" blade; one man easily changing the blade with a wrentfine lawn mowing, the same unit can be equipped with a lawn shield unit with runners, or the 30" lawn shield unit swivel glide caster wheels. A 26" weed cutting kit is also able for use with the basic machine frame. Large, open mowing is made easier by equipping the VP-75 with an riding operator's cart. The machine is powered by a 7 hp er For more details, circle (702) on the reply card.

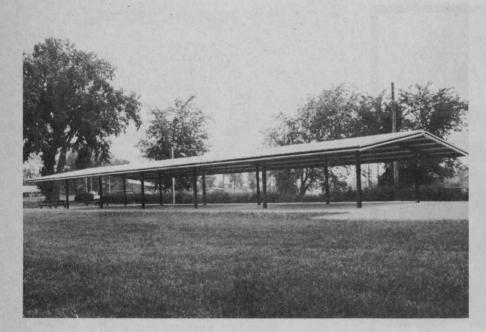

MODULAR PARK SHELTER, Cuckler Building Systems, Monticello, Ia.


A pre-engineered modular park shelter, this building can be erected by a local builder or supplied as a package for customer erection. Basic shelter, with three structural steel frames on 20' spacing, covers an area 52'x36'. The six-frame shelter illustrated has three additional 20' modules. Roof extends 8' beyond columns on sides and 6' at ends. Eave height is 8'. Twenty-six gauge roof panels with a 20-year color coating are attached to steel Z-purlins on 4' centers. Package includes frames and frame bracing, purlins, roof panels pre-cut full length, fascia, rake flashing with inset color stripe, boxed eave flashing, rubber ridge closure strip and steel ridge cap, and self-drilling fasteners for attaching roll panels to purlins. For more details, circle (705) on the reply card.



PLASTIC TWINE, Eastman Chemical Products Kingsport, Tenn.


After three years use, Powers Taylor of dale Nurseries, Hawthorne, N.Y., reports Polypropylene Tying Twin is superior to twine because of its inherent resistance to mildew and the damaging effects of well he says plastic twine is stronger and is on the hands. For more details about East Twine, circle (706) on the reply card.





UCT CATALOG, Hub States Corporation, napolis, Ind.

quick-reference catalog uses brightly colored symbols age indexes, clearly dividing the company's environal sanitation products into five easy-to-find sections. are: Cleaners and deodorizers; floor care products; icides; pesticides; and herbicides. The catalog is free. (703) on the reply card.



Miller's 24-page booklet is a combination catalog and manual on trailering safety. The safety aspects are covered in detail, containing suggestions useful to the novice and the professional. The catalog section features include a list of construction equipment, by model and manufacturer, and a matchup guide indicating the Miller trailer specifically designed to handle the piece of equipment. The company claims the quick-loading and unloading features of its trailers permit the user to cut unprofitable idle time of working machinery by moving it from job to job efficiently. For a free copy of the catalog, circle (704) on the reply card.




ANALYSIS OUTFIT, LaMotte Chemical Products Co., ertown, Md.

I AM-31 provides chemicals for making 250 tests and les 50 resealable soil sample bags. Individual moder chemical test equipment for making soil pH tests for determining levels of nitrogen, phosphorus and sium are furnished in polypropylene cases. The pH s made by means of a unique comparator that propermanent color standards for the following values: 0, 5.0, 6.0, 6.5, 7.0, 7.5, 8.0 and 9.0. Kit also concomplete instructions and soil analysis report forms. ore details, circle (707) on the reply card.




EQUIPMENT TRAILER, Clark Manufacturing Co., Atherton, Mo.

Load capacity is 1,000 lbs. Deck is 6'x8' replaceable pentatreated, exterior grade plywood. Remove one pin and the deck will swivel and tilt forward or backward for easy loading and unloading. Trailer has all-steel frame, automotive type springs and demountable wheels equipped with tapered roller bearings. Standard equipment includes combination stop, tail and directional lights, reflectors and safety chains. Sideboards are optional. For more details, circle (708) on the reply card.



EQUIPMENT SERVICE LIFT, G & H Products, Inc., St. Paris, Ohio

The new G & H Uni-Lift safely lifts 1,000 lb. loads to any working height up to 80" in less than 30 seconds. Rugged steel construction. Motor has automatic overload protection and a safety chain that locks into the bed when it is at working height. Heavy steel runways are 72" long and adjustable in width from 17" to 46". The Uni-Lift can be moved from spot to spot, if required. For more details, circle (709) on the reply card.



WEATHER GUARD CATALOG, Knaack Mfg. Co., Crystal Lake, III.

A newly revised edition of the Weather Guard catalog has been announced. The catalog illustrates several improvements to the line of truck chests and accessories. It also publishes changes to ordering procedures made necessary as the result of the recent purchase of Weather Guard by Knaack Mfg. Co. Copies are available free by circling (710) on the reply card.



VACUUM IMPROVEMENTS, Billy Goa Industries, Grandview, Mo.

Cast aluminum snout on the KD40 five height settings, from 36" up to Operator changes height by relevante lever while pushing down of ing handle. Steel impeller pulve leaves, twigs, thatch, clippings, and other litter to one-tenth original Bag is mildew-resistant. Optional inch diameter flexible hose can be to clean shrubbery. For more decircle (711) on the reply card.



PRUNING SAW, Village Blacksmith, Watertown, Wis.

Electric tree surgeon pruning saw reaches 15 ft. into tree. Called the first adjustable electric "vertical action" remote control reciprocating pruning saw with a 15 ft. aluminum pole and drive shaft power head that removes branches 3 to 4 inches in diameter plus trash and twig growth without injuring tree. For more details, circle (715) on the reply card.



SPRINKLER PATTERN SPRAY GAUGE, Larson Co., Santa Barbara, Calif.

Fast and accurate, this gadget for checking precipitation rate also indicates distribution efficiency of sprinkler irrigation system. Using a set of 10, a grounds superintendent can measure irrigation in about 5 minutes. When just 0.05 inches of water is collected in the cup, the signal flag floats free and drops by gravity. For details, circle (716) on the reply card.



GASOLINE-POWERED PRESSURE WASHER/SPRAYER, L&A Products, Inc., St. Paul, Minn.

L&A Model 6030 brings power cleaning to remote job sites vrunning water and electricity aren't readily available. It supply may be from a storage tank or garden hose. Power 4-cycle, 7 hp engine. Applies solutions at 3.2 gpm at 500 pressure. Unit features complete remote control starter and right on the gun. Three spray patterns — 0 degrees, 15 de and 45 degrees. Fourth position provides low volume at pressure. For more details, circle (717) on the reply card.



ET TRUCK, Larkin Aircraft Co., prville, Calif.

Jobber is a rugged miniature, wheeled truck that can carry an tor and 250 pounds up a gree grade. It weighs 135 lbs. osts less than \$350. Bed area, 10 or 31"x35"x15" and is 9" from d; folding ramp; turning radius, ; speeds to 25 mph; wheelbase, width, 53"; length, 68". For more s, circle (712) on the reply card.




TER, The Broyhill Co., a City, Neb.

royhill Co., announces the availy of the most complete line of and garden power sprayers in dustry. Different models include r-drawn sprayers, cart-mounted in) and platform mounted. Sizes 12½-gal. capacity; maximum ing pressures to 1,000 psi. Dealer ries invited. For more details, (718) on the reply card.




UREAFORM FERTILIZER, Du Pont Co., Wilmington, Del.

Uramite is a ureaform fertilizer with a high content of long-lasting, gradual release nitrogen. Labor-saving — one application lasts 6 to 8 months. Non-leaching, free-flowing, non-burning, clean, odorless and non-corrosive. Uramite is ideal for golf courses, parks lawns, highway roadside turf, ornamentals, potted plants and nursery stock. Formulations come in both granular and sprayable. For more details, circle (713) on the reply card.



HYDRAJUST TRACTOR SEAT, Rotary Power, Inc., Houston, Tex.

Safety and efficiency are the features. Seat fits most makes and models of tractors, allowing operator to remain level while the tractor is on a slope up to 33 degrees. Seat is adjustable forward and back to provide optimum degree of comfort and safety. Driver's weight, by means of a hydraulic cylinder, automatically adjusts seat to level position, thus eliminating traditional back problems, and insuring better operator control. For more details, circle (719) on the reply card.



DIVOT-REPLACER, American Mfg. Co., Des Moines, Ia.

New — just in time for Christmas — a hand-size professional greenskeeper quality divot-replacer. Lightweight (15 oz.) and easy to carry (10 inches long, $3\frac{1}{2}$ inches in diameter). Sturdy aluminum construction. For more details, circle (714) on the reply card.



HAND CLEANER, Goodrich Products, Houston, Tex.

Goodrich 745 Hand Cleaner is a water-less-type cosmetic-base cleaner that contains no harsh abrasives, ammonia or kerosene. It contains a bacteriostat to reduce the possibility of bacterial skin infection and the incidence of industrial dermatitis. Package quantities are 16 and 32 ounce in new heavy-duty polyethylene cans; 80 and 90 ounce in plug bottom cans; five-gal. in reusable plastic bucket; 55-gal. in open top drum. For more details, circle (720) on the reply card.