



MULTI-PURPOSE TRACTOR: Allis-Chalmers Corporation, Milwaukee, Wisc.

The work capacity gap between the lawn and garden and the agricultural tractor is now filled with this 616 model. It has a 16½ hp engine to power it for a variety of uses including large area mowing, contract lawn care, roadside mowing, seedbed preparation and other tasks. Overall dimensions are 83 inches long, 56 inches wide and 48 inches tall. Independent PTO drive is controlled by an electric clutch operated by a toggle switch on the instrument panel. Many features found on larger tractors are standard. For more details, circle (701) on the reply card.



TRAP TENDER: Skaggs Turf Equipment Co., Canfield, Ohio

Relax while you work in this easy-to-maintain unit. It features a short wheel base, low center of gravity, short turning radius and one piece fiberglass body. Rakes are 72 inches wide and adjustable in three independent sections. Thirty-three teeth scarify the trap. Drag plates give smooth finish. Unit is 65 inches long, 48 inches wide and 28 inches tall. The speed range is variable up to six mph. For more details, circle (702) on the reply card.



TRIMEC BENTGRASS BROADLEAF HERBICIDE: PBI-Gordon Corporation, Kansas City, Kans.

Control nearly all broadleaf weeds in Bentgrass and other 2,4-D sensitive grasses with this new herbicide. It contains Trimec concentrate, a mixture of 2,4-D, MCP and Dicamba. The three compounds perform more effectively than when applied separately, and with less material. It has no objectionable odor. Cool season control of hard-to-kill weeds is excellent and it keeps working through the warm season or in warm climates. For more details, circle (703) on the reply card.




FLEXIBLE ROTARY MOWER: BMB Company, Inc., Holton, Kans.

A 15 foot flexible rotary mower that cuts a full 180-inch swath is now introduced. Hinged wings float over rough terrain and follow contours easily. Each wing cuts a 60-inch swath while the center unit has a 72-inch cutting width. Wings can be operated at approximately 45 degrees up and 24 degrees down, and fold up, locking in place for travel. Unit uses manual or full hydraulic power. Wing gear boxes are 85 hp, the center gear box is 120 hp, and all three gear boxes have shear pins. Directional baffles are standard. Many options can be included. For more details, circle (704) on the reply card.




HEAVY DUTY MOWER, Roof Manufacturing Company, Pontiac, Ill.

Here's a push-type mower for the commercial market. Commercial "21" is built of 7-gauge welded steel frame and 12-gauge rolled steel cutting housing to extend the useful life. The model is available with 3½ hp or 5 hp engine and a 5 quart fuel tank for longer, stronger runs. For more details, circle (705) on the reply card.

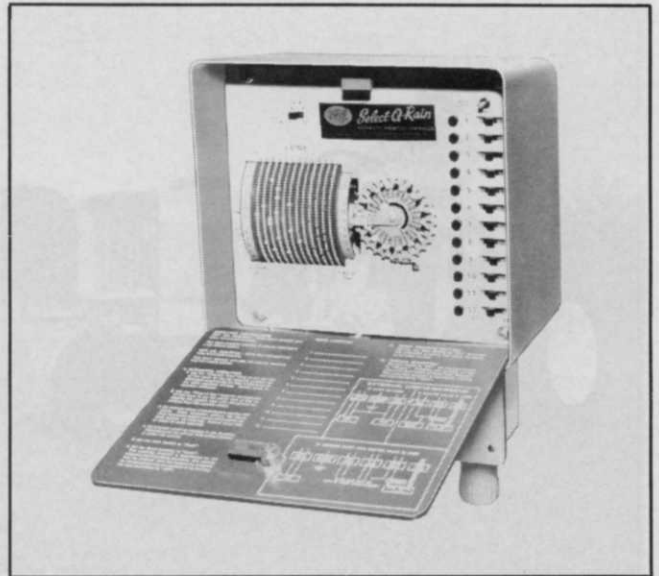

SELECT-O-RAIN: Hays Mfg. Div., Zurn Industries, Inc.

This 12 zone automatic controller for watering and irrigation features a patented drum programmer. The electro-mechanical timing and programming device incorporates sliding actuators to select the operation of any zone for any length of time, independent of any other zone. Can be programmed for 24 hour, 14 day operation with independent control of the AM and PM hours. Other items to be programmed into the controller are timing intervals, total watering cycle duration, time relays. Has a rain switch, circuit breaker, individual zone light and UL listed components. Wall or pedestal mounted. For more details, circle (706) on the reply card.

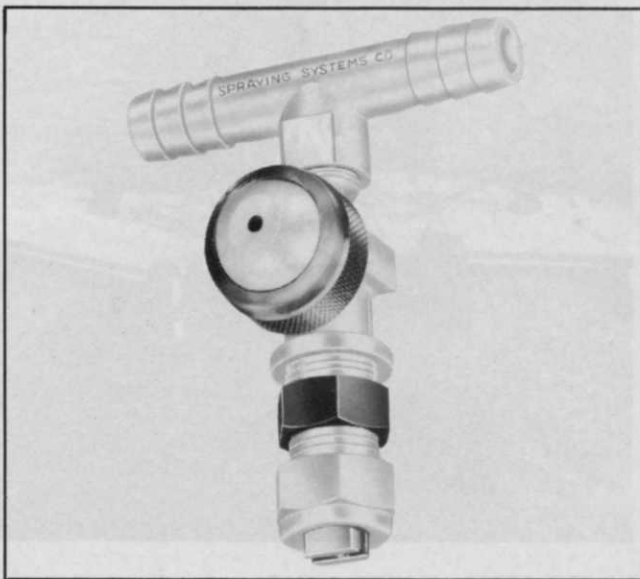


HOSE SHANK TEEJET NOZZLE: Spraying Systems Co., Wheaton, Ill.

This nozzle is designed with interchangeable spray tips for spraying herbicides and insecticides. Each nozzle includes a built-in diaphragm shut-off valve to provide quick and positive shut-off. Hose shanks, nozzle body and cap are made of nylon, as well as the diaphragm shut-off valve assembly. Hose shanks are supplied in two connection sizes for use with ¾ inch or ½ inch ID hose. For more details, circle (707) on the reply card.




VPC STUMP CUTTER: Valley Products Corporation, Valley, Neb.

Stump removal is now economical with this new stump cutter designed to meet the special needs of municipalities, parks, cemeteries, utilities, landscapers, tree surgeons and service firms. Model 5 weighs 145 pounds and is only 29 inches wide. It can be easily loaded into the back of a station wagon or truck for fast transport. Powered by an 8 hp engine, it can remove an 8 inch hardwood stump to 8 inches below ground in 3 minutes. For more details, circle (708) on the reply card.

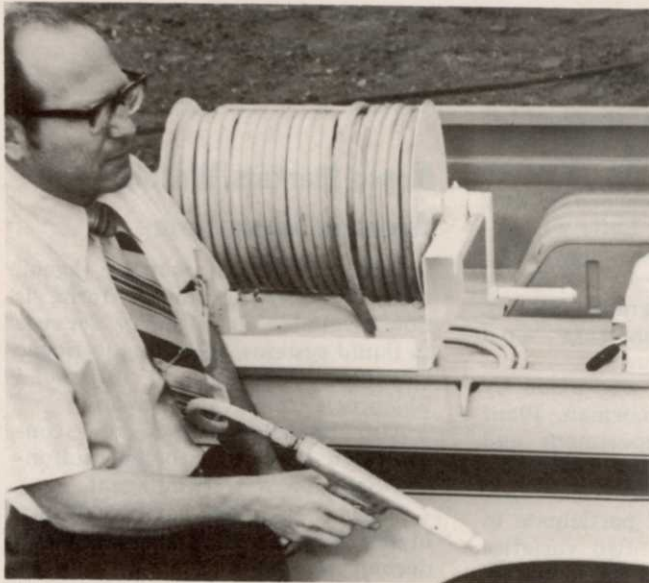


CURB-SIDE HOSE REEL: John Bean Division, FMC Corporation, San Jose, Calif.

Mount this curb-side hose reel to any pickup truck bed side. It holds up to 200 feet of $\frac{3}{8}$ inch hose. Equipped with an automatic drag to prevent hose overspin during use. The unit contains an easily-operated positive lock for traveling. Bearings on the reel are made of heavy-duty bronze. The inner drum is designed to accommodate hose expansion under pressure. For more details, circle (709) on reply card.

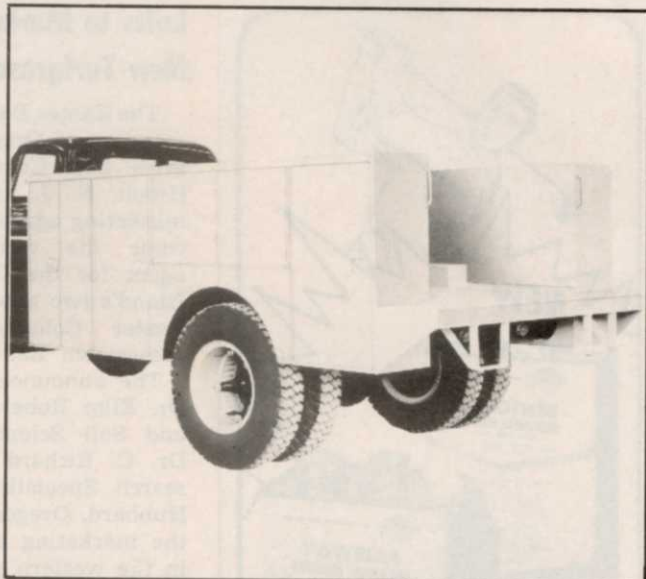

LINE BODIES, Knapheide Manufacturing Company, Quincy, Ill.

The H Series line of utility bodies for line construction and maintenance use range in length from 108 inches to 169 inches. They are built to fit standard truck chassis with cab to axle lengths varying from 60 inches to 124 inches. Two basic styles. The H model have a vertical compartment behind the wheelhousing. The BH model is designed without the rear compartment to shorten the overhang behind the rear axle and balance load conditions. Construction features include 14 gauge side compartment shells, 3/16 inch treadplate floors, weatherproof doors. For more details, circle (710) on the reply card.

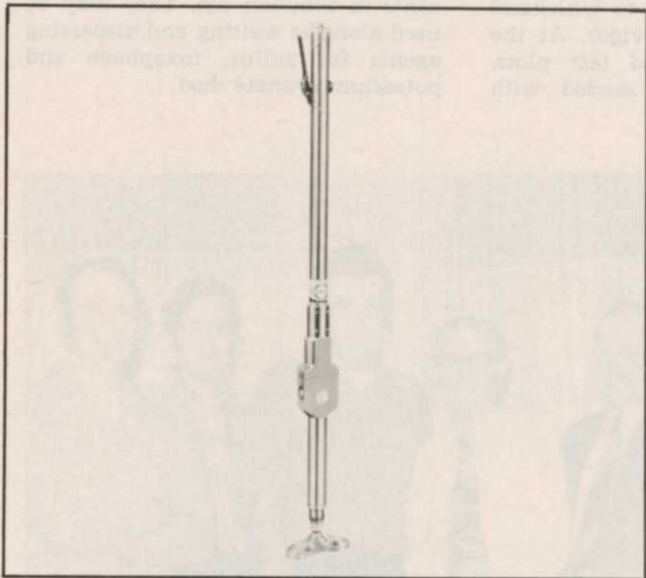

VALVE-IN-HANDLE TAMPER: Ackley Manufacturing Co., Clackamas, Ore.

Weighing only 25 pounds, this tamper features valve-in-handle on-off control. Provides the operator with complete control of the unit at the point of use. Unit delivers up to 1,600 full 3 inch strokes per minute operating at 2,000 psi and 10 gpm. Available with 2, 3 and 5 foot handle lengths. Three standard tamper shoes are available: kidney-shaped, round and rectangular. A ground rod driver accessory delivers enough drive for the longest ground rods in the toughest soils. For more details, circle (711) on reply card.



HIGH-LOW PRESSURE WASHER: Century Engineering Corp., Cedar Rapids, Iowa

The HPW-3D is a new three gallon per minute, high-low pressure washer that has the extra volume needed for flushing areas with heavy accumulations of material. Features handgun control from as far as 30 feet. The four-nozzle turret head on the handgun makes proper nozzle selection simple for every job. Nozzle selection includes 0 degree for blasting, 15 degrees for general purpose use, 40 degrees for large areas, or low pressure for applying cleaning materials. For more details, circle (712) on the reply card.

