

## PRODUCTS

**Planting auger** adapts in minutes to chain saw powerhead of 1.8 cubic inches or larger. International Reforestation Suppliers has built a



lightweight auger for use by one person. The rugged piece of equipment is available with 4- or 6-inch-diameter augers with carbide flighting and cutting edge.

Write 701 on reader service card

**Model 35 drinking fountain**, constructed of 10-gauge rolled steel and a green or bronzetone scratch-resistant epoxy finish, protects against vandalism. The Western Drinking Fountains product is guarded by 1/4-inch plate steel, and the push button valve is recessed within the pedestal to further protect it. The 36-inch fountain suits playgrounds, parks, golf courses, and other areas.

Write 703 on reader service card

**The Bradco Skid-Hoe** from American Trencher, Inc. allows the operator to dig trenches 6 feet, 6 inches deep and 36 inches wide. It at-



taches to the bucket quick attach system of most skid-steer loaders. It is available in two models: a 6 foot, 6 inch digging depth unit for skid-steer loaders 30 horsepower and over, and a 5 foot, 8 inch digging depth unit for under 30 horsepower loaders.

Write 705 on reader service card

**An electronic instrument**, the DMI-Surveyor model IIS, measures linear distance or rate of motion while a vehicle is in operation. It easily attaches to a car, truck, tractor, motorcycle, or any ground vehicle. With an accuracy of 99 percent, it measures land parcels to figure requirements of seed, fertilizer, insecticides-pesticides, water, and other calculated factors. It gives a constant read-out of the current distances traveled, area covered, or the current rate of motion at all speeds from 0 to 100 mph. Distance Measurement Instruments, Inc. makes it.

Write 717 on reader service card

**NEW NO DRIFT HERBICIDE APPLICATOR**

The weed killer is applied to the ground by the ribbed roller right alongside borders with no possibility of drift onto shrubs and flowers.

There is no waste. The herbicide is applied evenly and exactly where you want it.

Models from 18" to 36" wide; 1 1/2 to 6.6 gallons

**DERMOLEN CORP.**

119 Dorsa Ave., Livingston, N.J. 07039

Write 135 on reader service card

**The EGER BEEVER**  
the tree chipper at a brush chipper price!

- Very productive — chips diameters up to 12" — regardless of length
- Safe operation — no kick back
- Less expensive to operate. Knives changed quickly
- Curbside feed
- Heavy-duty

The Morbark EGER BEEVER will chip brush, sawmill slabs and edgings, Christmas trees, dry material and most other disposable wood products.

FOR MORE INFORMATION WRITE OR CALL:

**MORBARK INDUSTRIES, INC.**

WINN, MICHIGAN-48896  
PH. 517-866-2381

Dealerships Available

Write 138 on reader service card

**Put a WHIRLWIND FORCE to work to SWEEP UP LEAVES, LITTER, etc!**

**TAKE-ALONG 'BIG JOB' LOADER**

HAUL THIS 16 horsepower Mi-T-VAC on any truck (or trailer we make) and clean up wet or dry problems. Fills dump truck with leaves in 25 minutes!

**Lo-Blow, the Air-Broom®**

HEAVY DUTY BLOWER-SWEEPER helps a small crew gather more leaves, trash, clippings in less time. For details on today's 5 to 45 horsepower models, call Area 216 947-2344.

**ATWATER STRONG DIVISION**  
OF JOULEX INDUSTRIES, INC.  
BOX 68 • ATWATER, OHIO 44201  
LAWN EQUIPMENT SINCE 1949


**Model 16 SVL**

8 inch hose reaches out 20 feet

**VACUUMS 3400 CU. FT. PER MINUTE**

Write 119 on reader service card

# Versatile SKY-WORKER fills the bill from tree-trimming to hot line work

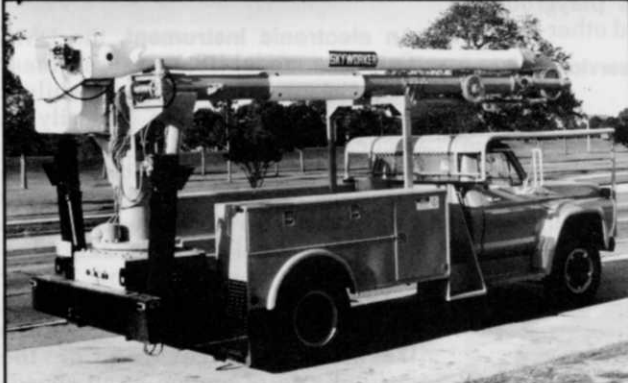

Why? Because Sky-Worker can prove cost-savings up to 50% through utilization of its built-in sturdy features and superior maneuverability.

Platform stays level under all conditions - dual controls operate unit from work platform or vehicle deck - Fail-safe hydraulic system, combined with optional heat-exchanger requires little warm-up time. Lower boom on Model 1035 moves through overhead arc of 135° degrees - 45 degrees past vertical - horizontal rotation is 400 degrees, 40 degrees beyond full circle.

See how Sky-Worker fits into your maintenance and trouble-shooting work plan. Write for FREE catalog, on your letterhead please.



## CORRECT MANUFACTURING CORPORATION

London Road Extension  
Delaware, Ohio 43015  
614-363-1951

Write 150 on reader service card

A one-step lawn mat, called Roll 'n Grow Lawns, applies grass seed, fertilizer, and straw mulch to provide a new turf. Action Lawns, Inc., the manufacturer, chops straw into short lengths and bonds it together with grass seed and starter fertilizer into either a 2 by 25 foot or 4 by 25 foot mat approxi-




mately ¼-inch thick. Seed mixes can be made to meet specific site needs.

When the mats are laid down on a prepared surface and watered, a bonding agent releases and helps bond the mat to the prepared surface. The straw protects the seed during germination and establishment and eventually breaks down to provide organic matter to the soil. The bonding agent deteriorates as the grass seeds take root.

Write 709 on reader service card


A 1½-inch plastic valve from WeatherMatic's 11024 Series is ideal for use in all types of sprinkler installations and water supplies. Low pressure loss helps efficiency. A brass flow control is standard.



The glass-filled nylon body resists chemicals in the soil. Flexing inlet orifice in the diaphragm resists clogging and mineral build-up. Stainless steel cover bolts have mating brass body inserts for ease of reassembly.

Write 715 on reader service card

To prepare seedbeds and incorporate chemicals, Bush Hog's Model 1440 tandem disc harrow comes in over 100 variations to work most soils. Gang angles of 20 degrees front and 18 degrees rear with blade spacing of 7½ inches, 9 inches, or a combination of both, pulverize soil and level fields. Wings flex nine degrees up and down for thorough plowing on uneven ground. Spring-loaded balkbuster (center tooth) with 10-inch sweep levels any ridge

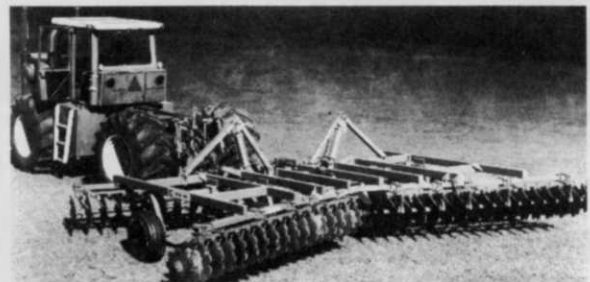

left in the center by the front gangs to insure smooth, well-worked fields. Three hydraulic cylinders control depth and wing folding.

Write 712 on reader service card