Lend a hand

The HitchHand provides short bed truck and SUV owners with a safe, low cost alternative for transporting lengthy, off-balanced cargo loads. The HitchHand measures 59 1/2 in. long, 27 to 49 in. in adjustable width; fits any standard t2-in. box receiver hitch; extends a truck bed an extra 38 in. (from edge of the downed tailgate); supports more than 750 lbs. in cargo load; weighs 46 lbs.; and fits behind the seat of a truck when not in use. It can convert any truck into a hauler of ATVs, motorcycles, canoes, kayaks, surfboards and sailboats. For more information, visit their web

site at www.hitchhand.com / Circle no. 277

Well-received

Draw-Tite's Titan receivers are designed for full size long wheel base trucks, vans and utility vehicles with full frames and heavy duty suspensions. It has a 12,000lb. Gross Trailer Weight (GTW) capacity and a 14,000-lb. GTW weight distributing capacity. The sturdy receivers are constructed with a secure heavy duty side bracket design, a 2 1/2-in. square receiver tube opening and an all frame attachment. The receiver unit has a pin, clip, receiver tube cover and welded electrical bracket. For more information contact Draw-Tite at 800/521-0510 or visit their web site at www.draw-tite.com / Circle no. 278

Lots o' trailin'

Bri-Mar Manufacturing's DT 612-

12 LPHD carries and dumps 4.6 cu. yds. of material. It features D-ring tie downs to secure equipment like skid loaders, small backhoes and other large payloads. With a 12,000-lb. GVWR, it also features a 6-ft. x 12-ft. bed size and twin telescopic cylinders. For more information, contact Bri-Mar Manufacturing at 800/732-5845 / Circle no. 279


Spray trucks

Westheffer Company, Inc. offers a wide range of spray trucks, from enclosed truck bodies to stainless steel truck beds, all sizes and configurations of tanks, gas engines or PTO-powered pumps. For more information, contact Westheffer Company, Inc. at 785-843-1633 or visit www.westheffer.com / Circle no. 280


Equip yourself

The 2001 Adrian Steel pickup truck equipment catalog features all kinds of pickup toolboxes, each with a three-year/36,000-mile product warranty. The toolboxes are constructed of diamond tread aluminum with low profile domed lids and pushbutton locks. Low profile side mount boxes, single lid saddle boxes and double lid crossover boxes are

available to fit both full-size and compact trucks. For more information contact Adrian Steel Company at 800/677-2726 or visit www.adriansteel.com / Circle no. 281



Northern Tool & Equipment Company's combo tool box and built-in auxiliary fuel tank is available in four styles in bright diamond tread plate aluminum. Tanks have a withdraw tube, return and drain fitting and a blank plate to mount a fuel pump or gauge sending unit. For more information contact Northern Tool & Equipment Co. at 612-894-9510 / Circle no. 282

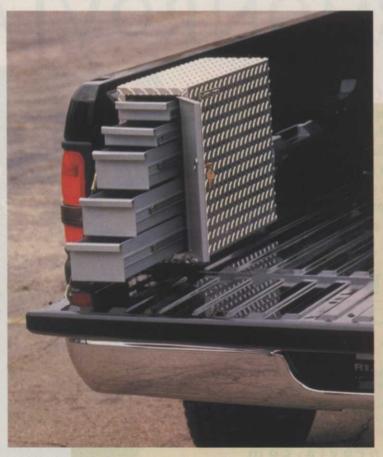

Sturdy steel

Reading's Redi-Dek is a sturdy steel platform offering the ability to use 2x4 stake posts or pull a gooseneck trailer. All body parts are electrically welded into one integral unit. The Redi-Dek receives Reading's Lectro-Life immersion priming to protect against rust. In the Lectro-Life® process, the platforms are submerged in a vat of electrically-charged primer adhering the paint to the steel. The Redi-Dek (including understructure) is finished with a black top coat. For more information contact Reading Body Works, Inc. at 610/775-3301 or visit www.readingbody.com / Circle no. 283



8300/8800 · Our Model 8300



- and 8800 (not shown) utilize a high torque fully reversible Eaton hydraulic motor.
- The Model 8300 attaches to the bottom or side of your front-end loader.
- The Model 8800 attaches to a Category I 3-point hitch.

Since 1910 -

DANUSER

Quality & Innovation DANUSER MACHINE COMPANY, INC.

502 E. Third St. • Fulton, MO 65251-0368

www.danuser.com • e-mail: sales@danuser.com

Tel: (573) 642-2246 • Fax: (573) 642-2240

Components are manufactured and assembled in the U.S.A.

• The Model 8900 utilizes a



high torque fully reversible Eaton hydraulic motor with a planetary gear driven

system. • The 8900 attaches to a Category I or II 3-point hitch. skid-steer or on the side of your front-end loader. · Our F series has been digging holes since 1943. The F8



Category I or II 3-point hitch 40 HP and above. The F8 gearbox

contains a spiral ring gear and pinion equipped with Timken bearings.

POST DRIVERS



- Our drivers have been in the field since the 1950's.
- · You maintain control of the driving head with the control handle
- · PTO or hydraulic models with hydraulic motors operating from 4 to 8 GPM at 1500 to 2500 PSI
- · Model BMDH easi-

ly leveled from boom support. Models MDH1 and MD6 level with tractor 3-point hitch.

FOR ALL 3 MODELS

- Free falling 235 lbs. weight.
- . Can drive 8' or 10' (depending upon model) length, up to 6" diameter wood or steel T-Posts.
- · One operating lever controls drive weight through the complete driving cycle.
- · Category I or II 3-point hitch.

PTO driven MD6 -

MDH1 - Hydraulic driven

BMDH - Boom mounted, hydraulic driven

G20/40 · Designed for Category I 3-point hitch 20 to 40 HP tractors.

. The G20/40 gearbox contains a forged ring gear and pinion equipped with (Not Shown) Timken bearings

RETROFIT SAFETY GUARDING is available for all older Danuser models! We encourage you to get current guarding installed on your older machines.