

when your season rolls around...



be ready to roll with a NU nes sod harvester

PATENT APPLIED FOR



NU nes Slab Sod Harvester . . .

lifts, cuts, and conveys slabbed sod to loading platform. Handlers can load directly on to pallet as tractor moves.

- With a NU nes Sod Harvester and three men you can lift, cut, roll and palletize up to 1200 square yards of sod per hour.
- The harvester, developed at Cal-Turf Farms in California, is designed to handle any length of rolled or slabbed sod.
- Field grading of sod is done by the tractor operator, who has clear visibility at all times.
- Hydraulic controls permit quick and easy adjustment for all conditions.
- The sod harvester travels alongside, never on the turf, during harvesting and can pick up and roll sod at any time your tractor can operate in your field.
- Sod can be cut with any type of sod cutter. The long ribbons can then be lifted and cut to any desired length from 24" to 90", size depending on thickness of sod.
- Loaded pallets can be spotted for later field removal and be clear of the next harvest run. If direct truck loading is desired, a conveyor extension is available.
- The basic power train is a Ford LLG-2110 wheel tractor. The sod harvester can travel at speeds up to 17 MPH for quick transportation between plots.
- The efficiency of this all-mechanical operation has been proven on Cal-Turf Farms in Patterson, California, and it can solve the problem of quick and economical harvesting of sod for all turf farmers.


For more information please contact:

THE JOHN NUNES MECHANICAL HARVESTING CO.

2006 Loquot Avenue, Patterson, California 95363, Phone (209) 892-6311



**Forget the winter,
General. Get a good
start this spring
with NITROFORM®**

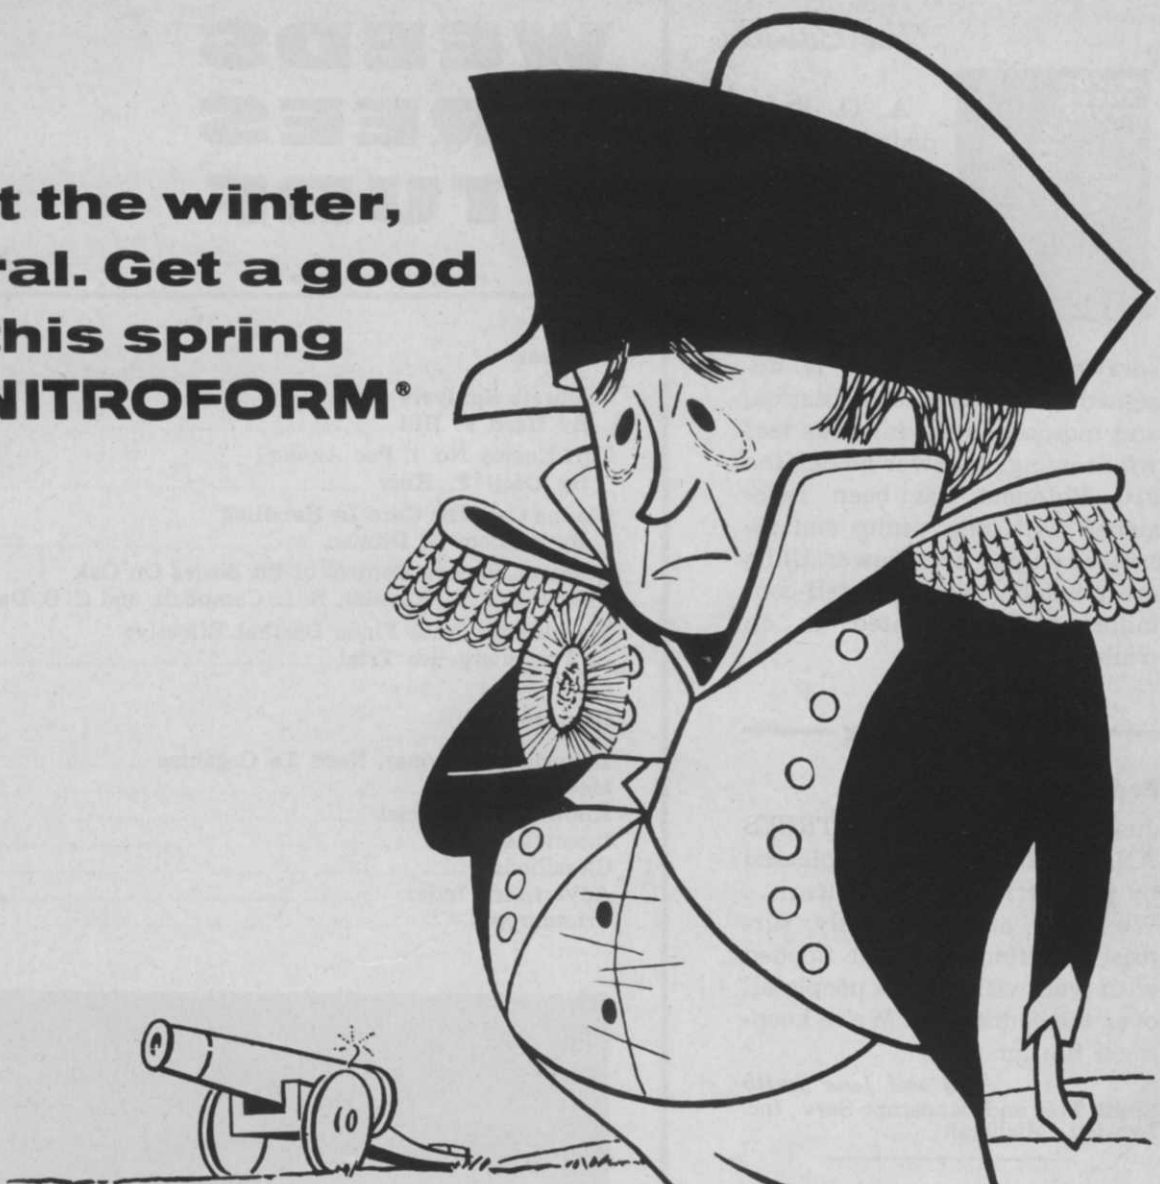

Like Napoleon, some superintendents had a rough winter. And with the spring, traffic becomes heavy.

A spring feeding with Nitroform restores turfgrass damaged during the winter and strengthens it for the heavy traffic. Spring feeding with Nitroform also gives turf a growing start ahead of weeds, and builds residual nitrogen to help turf through the summer.

Nitroform, Hercules' ureaform turf food, contains a whopping 38% nitrogen, but releases it slowly as the grass requires. Its use saves storage and handling. It is odorless and nonburning and is available as granular Blue Chip® and sprayable Powder Blue*.

Ask your Nitroform supplier about a spring fertilization program, or write: Turf & Horticultural Products, Synthetics Department, Hercules Incorporated, Wilmington, Delaware 19899.



*HERCULES TRADEMARK

STH67-3

The Cover



A. O. Kalp, distributor at Middletown, N. Y., demonstrates Model 100G Rotomist from John

Bean's power spraying division. Unit is designed for shade tree, sanitation, and mosquito spraying plus leaf windrowing. A newer model, the 51C Rotomist has been redesigned with new pump and increased engine horsepower. Units are available either as self-contained truck mounted or on trailers.

WTT Mailbox

People Read WTT . . .

Just received WEEDS TREES AND TURF and are very pleased by your write-up of our firm . . . We were also pleasantly surprised to find our mail flooded with well wishes from people all over the country . . . We're keeping a file for you . . .

Ted and Jane Smith

Smith Tree and Landscape Serv., Inc.
Lansing, Michigan

All Over . . .

On behalf of Janox Corporation, I would like to thank you for the feature story on our Reflector Landing System . . .

One of our directors made a trip out through Nebraska last week right after the publication came out, and most people he contacted had read it, and it had created a lot of interest . . .

(Mrs.) Hazel E. Yeomans

Janox Corporation
Arcanum, Ohio

the Country . . .

Lately I have been receiving many inquiries about our roller unit from all over the country. Thanks to your magazine, it has been a big help . . .

Carl F. Schuman

Merion Sod Farms, Inc.
Utica, Michigan

WEEDS TREES and TURF

FORMERLY WEEDS AND TURF

March 1968
Volume 7, No. 3

Features:

Calibrate Sprayers Often By Herb P. Hill	7
Turf Enemy No. 1, <i>Poa Annua</i> By Cecil F. Kerr	13
Claims Call For Care In Handling By William D. Ditman	18
Research Report, Control of Pit Scales On Oak By Drs. C. S. Koehler, R. L. Campbell, and C. S. Davis	20
Washington State Finds Dacthal Effective In Postemergence Trial	34

Departments:

Editorial: Spraymen Need To Organize	6
Meeting Dates	37
Know Your Species	40
Insect Reports	42
Classifieds	43
Advertisers Index	43
Trimnings	44

Advertising Sales Offices:

President and Publisher
James Milholland, Jr.

Editor and Editorial
Director
Arthur V. Edwards

Managing Editor
Donald D. Miller

Vice President
Advertising
Kenneth H. Constant

Director of Advertising
Dan M. Humphrey

Director of Circulation
Roy Bever

Production Manager
Eugene M. Kopp

National Headquarters—9800 Detroit Ave.,
Cleveland, Ohio 44102, 216+631-6468;
Chicago, Ill. 60601—333 N. Michigan Ave.,
312+236-9425; Shawnee Mission (Kansas
City), Kansas 66202—6811 W. 63rd St.,
913+722-5900; New York City 10017—
757 Third Ave., 212+421-1350; Rosemont,
Pa. 19010—1062 Lancaster Ave., 215+525-
1874; Columbus, Ohio 43212—1350 W.
Fifth Ave., 614+486-9638; East Lansing,
Mich. 48824—322 Abbott Rd., 517+332-
3521; Los Angeles, Calif. 90005—The Es-
chen Co., 3142 Wilshire Blvd., 213+382-8391;
San Francisco, Calif. 94104—The Eschen
Co., 57 Post St., 415+781-7440.

BPA Application Applied For

WEEDS TREES AND TURF is published monthly by The Harvest Publishing Company.
Executive, editorial: 1900 Euclid Ave., Cleveland, Ohio 44115.

Single Copy Price: 50 cents for current issue; all back issues 75 cents each. Foreign \$1.00.

Subscription Rates: U.S. and possessions, 1 year \$7.00; 2 years \$12.00. All other foreign
subscriptions 1 year \$10.00. Change of Address: Three weeks advance notice is necessary
for change of address. Both old and new address must be given. Post Office will not
forward copies. Controlled circulation postage paid at Fostoria, Ohio 44830 application
pending.

© The Harvest Publishing Company, 1968

**Lay a
metered
spray
on every
square foot!**



**... with accurate, fast, new Mallinckrodt Spray-Hawk™
Mobile Turf Sprayer.**

Put an end to "hit-or-miss" spraying! The new Mallinckrodt Spray-Hawk treats your turf to exact, *calibrated* dosage of herbicides and pesticides. No missing or dangerous overlapping. No zig-zag patterns. No guesswork.

Yet Spray-Hawk weighs less than 30 pounds—it won't bruise or damage even the finest bent-grass greens.

Operation is simple. Just check your operator's natural walking speed on the Spray-Hawk Operating Data Chart, and adjust the pressure

to deliver precise, recommended dosage. Your Spray-Hawk *tells* you when you're spraying right!

Take a look at that low-riding boom, too. You can spray at low pressures recommended by turf authorities—as low as 30 p.s.i. Eliminate problems of misting, blowing and waste. And the inexpensive Spray-Hawk connects to your present pressure equipment.

So don't let spotty spraying spoil your turf. Call your Mallinckrodt distributor today and take a walk with "the Hawk."

Mallinckrodt

Turf Chemicals

Mallinckrodt Chemical Works • St. Louis • New York • Los Angeles

The Right Approach to Your Turf Problems!



CHIPCO® TURF PRODUCTS

**Specially Formulated
Pesticides for Turf**

MOST COMPLETE LINE UNDER ONE LABEL

No need to buy various brands of pesticides to solve your turf problems. CHIPCO brand offers the most complete line available for control of weeds, turf insects and diseases.

Poa annua restriction, crabgrass prevention, broad-leaf weed control . . . you name it and there is a CHIPCO product to do the job!

Include CHIPCO turf products in your maintenance program. They are specially made for golf courses and other turf areas.

ASK YOUR SUPPLIER OR

chipman
WEED CONTROL

**RHODIA INC.
CHIPMAN DIVISION**

Dept. T, Box 2009
New Brunswick
New Jersey 08903

Spraymen Need to Organize

Spraymen need a national association. Most belong to state groups, many of which are very effective. But today they have become professional businessmen, and need more than ever to pool their efforts as a national voice.

The spraymen we have talked with are aware of their public image. They know that careful application techniques are mandatory to help that image. They are careful that they render effective service. In short, spraymen are doing much to improve their stature as professionals in a growing and important industry. Yet their state groups have not been able to set up a nationwide organization which could give them the collective influence needed.

Today, spraymen in many states are facing restrictive legislation. Rulings seldom affect only one state. Spraymen constantly face new restrictions which affect every spray operator in the nation.

Naturally, certain restrictive rulings are necessary for the common good. But many times these are made without benefit of the combined experience of spray operators. An association voice, particularly on a national basis, could contribute information which would reflect the effect such rulings would have on the professional spraymen.

We happen to believe that spraymen can protect their interests and at the same time remain aware of the rights of the citizenry. We believe they can best do this when they are heard in unison; that is, when they speak as a national group.

Most lawmakers are perfectly willing to discuss problems with the individual, particularly when he is a constituent. But we can't believe that the individual will be likely to get action as readily as if he were speaking for a group.

Legislation is but one of the important benefits of national association. Many others can be cited. For example, association programs serve as a central outlet for new information. New research, methods, equipment, business management, and trends across the country become immediately available to the active association member. Help for unusual problems is within easy reach as needed.

We sincerely hope that spraymen, because of the importance of their profession to the nation, will shortly organize nationally.

WEEDS TREES AND TURF is the national monthly magazine of urban/industrial vegetation maintenance, including turf management, weed and brush control, and tree care. Readers include "contract applicators," arborists, nurserymen, sod growers, and supervisory personnel with highway departments, railways, utilities, golf courses, and similar areas where vegetation must be enhanced or controlled.


Calibrate Sprayers Often

Beat Problems Caused By Damaged, Worn, or Plugged Orifices

By HERB P. HILL

FMC Corporation, John Bean Division

San Jose, California

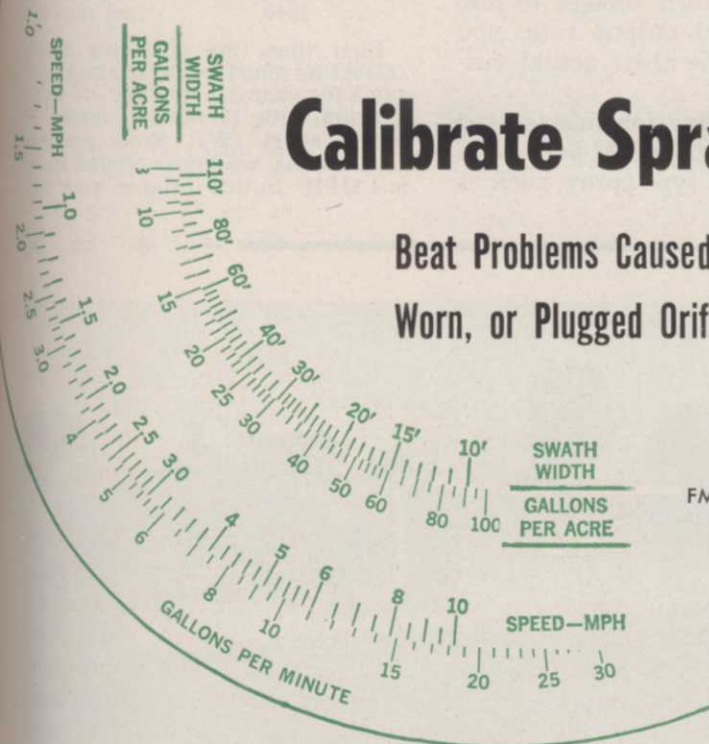

NOTEWORTHY PROGRESS in studies of turf problems by experts at state universities and experiment stations has made good maintenance somewhat easier. Likewise modern chemical technology has developed new chemical sprays which assure good control of both animal and plant pests. Higher costs of modern day chemicals, and critical rates at which they must be applied for best results, make close attention to sprayer calibration important.

Current information, formulas and procedures can help the somewhat perplexing and complicated-appearing task of calibrating sprayers. Correct sprayer and boom calibration are important to the success of a control program.

Consider Four Factors

There are four major factors to consider in the calibration of a turf sprayer:

- (1) Nozzle spacing on the boom and boom width;
- (2) Ground speed of the sprayer in miles per hour, MPH;
- (3) Recommended application rate; in gallons per acre, GPA;
- (4) Discharge rate per nozzle in gallons per minute, GPM.

Discharge rate of the nozzle depends on the size of the nozzle orifice and the operating pressure of the pump. Consider all of these factors and how you may utilize them to arrive at the recommended rate of application.

Nozzle Spacing

Nozzle spacing is a known factor, as is the width of the boom. To determine the spray swath, or effective width of your boom, simply measure the distance between nozzles and multiply by the number of nozzles on the boom.

For example, assume you have a boom with 13 nozzles, spaced 20 inches apart. Thus, $13 \times 20 = 260$

inches, divided by $12'' = 21$ ft. 9 in., the effective width of the boom.

Determine Ground Speed

Consider the ground speed of the sprayer and select the speed best suited to the type of terrain. Determination of this speed is made with the tractor and sprayer in motion. When the desired speed is found, drop a marker, a stick or a wrench. Exactly one minute later, drop another marker. Measure the distance between markers to find the number of feet traveled in one minute (60 seconds). With this information, compute the speed of travel, in MPH, with this formula:

$$\frac{\text{Distance in feet}}{\text{Time in seconds} \times 1.47} = \text{MPH}$$

Example: If 360 feet is the distance traveled in one minute, or 60 seconds, the speed of travel is 4 MPH.

$$\frac{360}{60 \times 1.47} = 4 \text{ MPH}$$

In this example, 360 represents the

distance traveled and, according to our formula, is divided by 60, representing the time, in seconds, during which the distance was traveled. This is multiplied by the constant 1.47. Thus; $60 \times 1.47 = 88.2$ which now becomes our divisor:

$$\frac{360}{88.2} = 4 \text{ MPH}$$

Determination of the speed of travel is the *most important step* in the calibration of a turf sprayer. The method described above is easy to follow. If your vehicle has a speedometer, this step, of course, can be eliminated.

Know Proper Rate

The third factor to decide on is the recommended application rate. This is almost always a known factor and should be the gallons-per-acre (GPA) rate recommended by your turf advisor or experiment station. Such turf specialists should be consulted for recommended application rates for various types of spray materials and control programs. They are best qualified to advise you on these subjects.

Figure Nozzle Output

A fourth factor to consider is the rate of discharge per nozzle in GPM, or the nozzle output. This can be obtained from

sprayer manufacturers, manufacturers of nozzle tips, or from spec sheets that accompanied the equipment when it was purchased.

If such data are not available, or you suspect the nozzle orifices (holes) are worn enough to lose their original output rate, you can determine their actual output yourself.

The following formula is used to determine the GPM per nozzle for a blanket type spray, such as

is used in overall fairway spraying operations, when the rate of travel in MPH, the *desired* application rate in gallons per acre (GPA), and the nozzle spacing, are known:

$$\frac{\text{GPAPN} \times \text{MPH} \times \text{W}}{5940} = \text{GPM per nozzle}$$

First then, the GPA per nozzle (GPAPN) must be determined. Assume for example, that we are using a boom with 13 nozzles, spaced 14 inches apart (W). From previous calculations, we know ground speed is 4 MPH. In this instance, your turf



With nozzles set to spray at 65 degrees, this boom spray system delivers even coverage with little drifting caused by wind. Boom is 22 inches from the ground.

Eighty degree spray patterns assure adequate overlap by this boom sprayer system. Conical discharge patterns of the spray marks this boom as well maintained.



advisor has recommended 5 gallons per acre (GPA) as the dosage. Next, multiply GPAPN (5) by MPH (4) and then by the nozzle spacing (W) in inches (14). Divide by the constant 5940 and the answer is .047 GPM per nozzle. Here are the calculations:

$$\begin{aligned} \text{GPM per nozzle} &= \frac{\text{GPAPN} \times \text{MPH} \times \text{W}}{5940} \\ &= \frac{5 \times 4 \times 14}{5940} \\ &= \frac{280}{5940} \end{aligned}$$

$$\text{GPM per nozzle} = .047$$


To apply 5 GPA, using a boom with 13 nozzles spaced 14 inches apart when the ground speed is 4 MPH, each nozzle must discharge .047 GPM.

If the nozzle spacing is 20 inches, which is standard spacing on most booms sold today, use 20 as the value of W.

To determine if your nozzles discharge the correct amount,

$$\div + = \times$$

This little can turns into a giant!

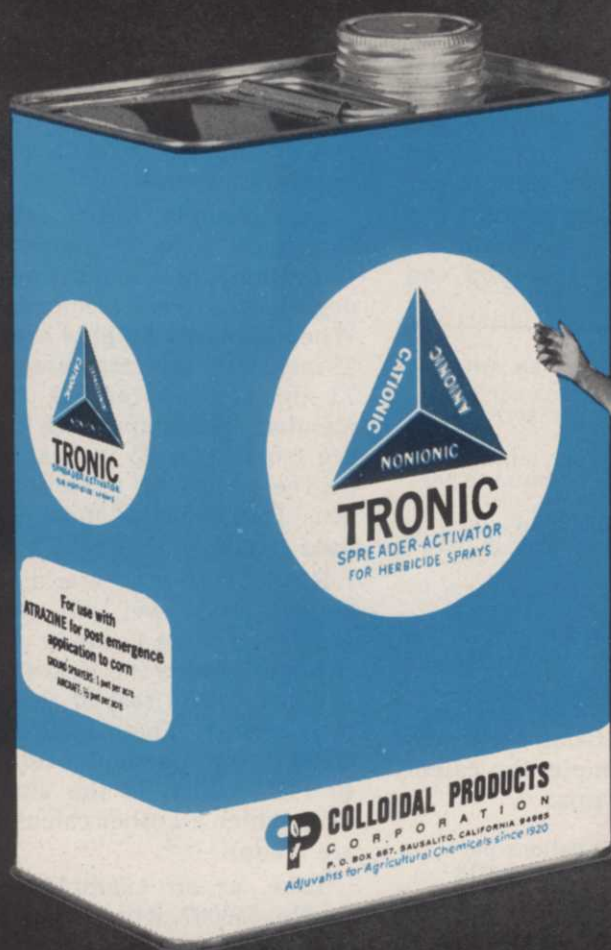

A gallon of TRONIC® does a better job than 15 gallons of oil with herbicides

IN CALLENDER, IOWA—“Why handle a large barrel of oil when you can get the same results from a small can of TRONIC.”

Garland C. Hanson, Farmer

IN MONROE CENTER, ILLINOIS—“We could easily haul enough TRONIC in a pickup truck to treat 1000 acres of corn.”

Ellwood L. Atchison, Custom Applicator

IN BLAIR, NEBRASKA—Kill of standing weeds was unbelievable with ATRAZINE-TRONIC.”

Byron Appleby, Aerial Applicator

Ask your Agricultural Chemical Supplier or write Colloidal Products Corp. Box 667, Sausalito, Calif. 94965

TRONIC®

The non-foaming adjuvant for herbicide sprays



check the discharge of one nozzle in a calibrated container for one minute, while the sprayer is operating at 40 p.s.i. If the output from the nozzle is supposed to be .067 gallons per minute, 8.5 fluid ounces should have been collected during the one-minute discharge time.

To convert ounces to gallons, use the following formula (128 oz. = 1 gal):

$$\frac{128 \text{ oz.}}{1 \text{ gal.}} = \frac{8.5 \text{ oz.}}{Z}$$

$$128 \times Z = 1 \times 8.5$$

$$Z = .067 \text{ GPMPN}$$

If, for example, more than 8.5 oz. are collected in one minute, substitute the number of ounces you collect for the 8.5 in the above formula to get the nozzle output.

These calculations may not appear to be important, but remember that 3/100ths of a gallon excess output per nozzle, multiplied by the number of nozzles on your boom and the number of minutes of use in the field, will total many gallons of wasted chemical.

Determine GPA from Worn Nozzle

If the nozzle being calibrated turns out to be the proper size, things are fine. However, in case the calibration does not come out as required, don't throw away the nozzles. Here is another formula which reveals what gallons per acre application they will give.

$$\text{GPAPN} = \frac{5940 \times \text{GPMPN}}{\text{MPH} \times W}$$

For example, multiply the constant 5940 by the actual GPM measured from each nozzle during one minute at 40 p.s.i. This product is divided by MPH \times W, and the answer will give you the gallons per acre per nozzle (GPAPN).

Let us say that nozzle discharge was measured to be .067 gal. (8.5 oz.) per minute, that MPH is 4, and the nozzles are spaced 20 inches apart. Putting these values into the formula, we have:

$$\text{GPAPN} = \frac{5940 \times .067}{4 \times 20}$$

$$= \frac{397.98}{80}$$

= 4.9 gallons per acre your nozzle will discharge.

Total GPA is thus found by multiplying the number of nozzles (13) by GPAPN (4.9). The answer is 65 gallons per acre which, in this case, was the recommended rate.

Suppose that the nozzles are

worn, the orifice sizes are enlarged, and the discharge rate is greater but to an unknown degree. This same formula will tell you their exact capacity, as well as the gallons per acre they will apply.

Suppose your one-minute measurement revealed a discharge rate of 12.5 fluid ounces. Convert this to gallons (12.5 fl. oz. ÷ 128 fl. oz. = .097) and you will come up with a figure very close to 0.10 gal. per minute per nozzle. Use this known result in the above formula to obtain the exact gallons per acre you can

Abbreviations Used in This Article

GPA	= Total gallons per acre
GPAPN	= Gallons per acre per nozzle
GPM	= Gallons per minute
GPMPN	= Gallons per minute per nozzle
MPH	= Miles per hour
W	= Nozzle spacing in inches
APH	= Acres per hour
Y	= Boom width in feet
8.25	= Constant for APH
5940	= Constant for GPMPN

expect to obtain from worn nozzles. In this example, the calculations look like this:

$$\frac{5940 \times .10}{4 \times 20} = 7.4 \text{ gallons per acre per nozzle}$$

Multiplying this result by your 13 nozzles, $13 \times 7.4 = 96.2$ GPA, the output these 13 nozzles produce. This higher rate per acre results directly from the worn orifices in the old nozzles. If the rate per acre is satisfactory for your program there is no reason why they cannot still be used. But, if the rate is too high, discard the nozzle tips, and buy new ones of correct size. Depending on the abrasives in your water supply, nozzle wear is not uncommon, even within a short time.

It is possible to reduce the GPA rate even with worn nozzles by increasing the ground speed. However, for most courses a speed much more than 4 MPH is not too practical.

What Nozzle Numbers Mean

When you see a nozzle tip which reads 650067 or 65015 or 73039 or 800067 or 8002, have you ever wondered just what these numbers mean to you? Actually nozzle numbering systems are easy to understand once they have been explained.

First thing to remember is that the first two numbers *always* indicate the angle of spray discharge. Thus any nozzle beginning with 65, such as 650067, has a 65 degree spray angle; any nozzle beginning with 80, such as 8002, has an 80 degree spray pattern. The reason for these different angles is to provide a 25% overlap in spray pattern for even coverage when the nozzles are used at various heights from the ground.

For example, when spraying height is 17 to 19 inches from the ground, the wider angle, 80 degree nozzles are recommended. When spraying heights are 19 to 21 inches, an intermediate nozzle, 73 degree series, is recommended. When spraying heights are from 21 to 23 inches, the 65 degree series is recommended. This last series is most widely used today.

Risk of drift is greater at wider angles. Narrower, 65 degree nozzles, provide a coarser droplet size and reduce the risk of drift.

What do the rest of the numbers mean? They indicate the GPM of that particular nozzle at 40 PSI (which is the standard from which all other calculations are made).

Take, as an example, nozzle tip No. 650067, which happens to be the same nozzle used in our previous examples. To know the GPM of this nozzle at 40 PSI, simply count three decimal points from the left and place a decimal point. We find we have the decimal .067, which is the GPM of this nozzle at 40 PSI.

If you had a nozzle numbered 65015, you would count over three places from the left and place the decimal point between the zero and the 1. You would then have the decimal .15, which represents the GPM at 40 PSI of this nozzle. If you had a nozzle carrying the number 73039, you'd place the decimal point three places from the left between zero and three; the nozzle would have an output of .39 GPM at 40 PSI. Now let us say you have some nozzles marked 800067. Counting three places from the left, you'd place the decimal point

between zero and zero. The remaining decimal is .067 GPM at 40 PSI; the same as nozzle No. 650067 used in an earlier example, but in the 80 degree series. Thus the GPM capacities of various spray angles, can be duplicated.

Set Pump Pressure

Up to this point we have not discussed pump pressures. To maintain the gallonage requirements per nozzle, pounds of pressure per square inch must be known. When a nozzle chart is not available, this can pose a problem because it is necessary to maintain exacting pressures in order to obtain an accurate rate of discharge from a nozzle.

The formula to obtain the GPA per nozzle has been shown. From our example, we determined that .067 GPM per nozzle was required. To determine the proper pressure setting at the relief valve, or regulator, the following steps should be taken:

- (1) Install all nozzles in the boom.
- (2) Start the sprayer and run at factory-governed speed if engine driven; if power-take-off (PTO) operated, set tractor throttle at predetermined position for the proper ground speed we have selected and the proper PTO speed. This should be the equivalent of 560 RPM on the PTO shaft.
- (3) Set the sprayer relief valve or regulator at an approximate setting of from 40 PSI to 60 PSI.
- (4) Start spraying, open the boom valves to full capacity. Catch the discharge from two or more nozzles in separate containers for exactly one minute.
- (5) Measure the material discharged and compare it with the quantity needed. As we have previously determined, this quantity should be .067 gal., or 8.5 fluid ounces per nozzle. If the quantity discharged is too little, increase the pump pressure slightly and recheck; if the quantity is too great, lower the pressure slightly and recheck.

Several settings may be required the first time this pressure calibration is made, but with a little experience, much less time may be required for later calibrations if they become necessary.

Formula for Acres per Hour

Still another formula we have not discussed is quite useful to
(Continued on page 44)