

# OTS Conference Highlights

Sportsfield Drainage: Learning From Mistakes (Case 2) by Dr. Bob Sheard ♦ Tired Soil: Using Inorganic Soil Amendments to Perk up Your Root Zone by Paul Grünthal

## Sportsfield Drainage: Learning from Mistakes (Case 2)

DR. BOB SHEARD, P. AG., AGRONOMIST, GUELPH TURFGRASS INSTITUTE

**A**n Ontario soccer club was successful in raising money to develop an outdoor sports facility designed to have several soccer fields. Provincial and municipal support was received contingent on the club obtaining the necessary environmental clearances and providing the city with a site development plan. A landscape architect was engaged to provide the necessary clearances and plans—plans which met with city approval. Following this initial work, few financial resources were left to develop the first field. A sketch of the soil profile and minimal directions were provided to the club by the architect.

The architect suggested removal of the surface 15 cm of topsoil, which was a clay loam, shaping the field to 2.0% grade at centre field for drainage, placing a 10 cm layer of sand over the entire field, and then replacing the topsoil (Figure 1).

During late April and early May, spring fertilization and mowing of the establishing grass were delayed due to wet conditions on the field. Any maintenance operations which were attempted resulted in severe rutting by the tractor. Later in July and August, the field became very dry and hard as no irrigation was available and the grass was in poor condition. Turf outside the field, however, remained in relatively good condition as rather timely rains were experienced throughout the area.

Coring revealed the subgrade below the sand layer was not penetrable with a hand soil probe.


### What Went Wrong?

There were two major errors in design and construction. The major problem was the sand layer below the topsoil which created two zones of pore size discontinuity. The first zone was between the subgrade and the sand layer. At the interface of the subgrade and the sand there is a change from relatively large pores in the sand to very small pores in the subgrade. As often happens in sports field construction, the earth moving was done in the fall under wet conditions with large-size, earth moving machinery. This operation resulted in a compacted subgrade with further reduction in porosity through which one would expect a very low rate of water movement. Thus, winter snows and spring rains would keep the sand layer saturated for a long time in the spring. In turn, the water in the saturated sand layer would rise into the topsoil by capillary action, keeping the surface soft and resulting in the observed rutting by the tractors.

The second zone of pore size discontinuity occurred at the

interface between the sand layer and the topsoil. Here the discontinuity is in the reverse direction where relatively fine pores in the topsoil overlay large pores in the sand. Initially in the spring, drying out would be delayed because a perched water table would develop in the topsoil at this interface, adding to the wetness of the surface. When the system finally dried out during midsummer, capillary flow of water from the subgrade upwards through the sand to the topsoil would be interrupted resulting in the turf having to rely only on the available water stored in the 15 cm of topsoil.

The second error in the design was the use of an excessive crown as a substitute for drainage. Although a 2.0% grade would effectively shed most of the water if the field were a bare parking lot, a dense turf, the prime prerequisite of a good soccer field, is the best system known to soil conservationists to prevent run-off. If run-off is prevented through the turf cover, the water which falls on the surface must infiltrate the soil surface and be removed by natural or artificial internal drainage systems. While a crown may be of value in a parking lot, it adds little to the drainage of a sports field.

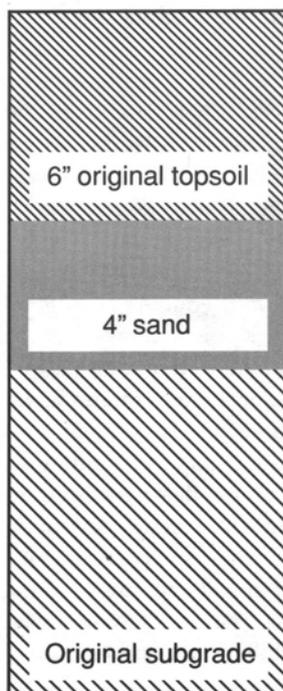

**Figure 1: A schematic drawing of the soil profile of the soccer field.**

The architect suggested removal of the surface 15 cm of topsoil, which was a clay loam, shaping the field to 2.0% grade at centre field for drainage, placing a 10 cm layer of sand over the entire field, and then replacing the topsoil. So, what went wrong?

### Fixing the Problem

The solution to their problem is expensive. The sand layer must be removed. To do so requires that the topsoil be carefully stripped from the field and stock piled before the sand is removed and discarded. Some intermixing of the soil and sand is unavoidable where the stripping is done with large equipment.

The question is asked: "Why not mix the sand and soil together"?

There is a grave danger in mixing the topsoil and sand together in that the resulting mix will be very highly compactable and the field will have very poor water transmission characteristics. It is also very difficult to obtain a good blend of soil and sand unless the material is passed over a power screen and the

moisture content of the materials during screening is appropriate to allow good fragmentation of the structure of the topsoil. Satisfactory mixing cannot be achieved with a rotovator or by deep cultivation.

When designing a soccer field, it is best to stay with the soils which were left there by nature unless you understand the physics of water flow in soil. As with any major surgery, it is advisable to get a second opinion. ♦

"When you come to the end of your rope,  
tie a knot, and hang on."  
— Franklin D. Roosevelt



EQUIPMENT LTD.

**Paul Turner**

*Sales Representative*

Cellular: (416) 566-0211 Pager: (416) 547-0148

1184 PLAINS ROAD EAST, BURLINGTON, ON L7S 1W6  
Burlington (905) 637-5216 Toronto (905) 338-2404  
1-800-883-0761 Fax: (905) 637-2009



**Brian Rosenberg**

*Technical Sales Representative*

Tel: 1-800-461-6471

Cell: 519-581-2636

Fax: 1-800-305-0914

E-mail: brianr@nu-gro.ca


**Nu-Gro Professional**

2270 Speers Road

Oakville, ON L6L 2X8

Product Info Line: 1-800-268-2806

## We've heard a Rumour ... You're about to buy a Groomer!

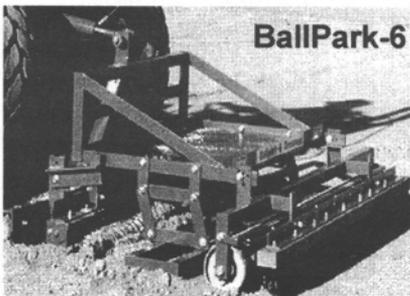


**BallPark-6**

### BallPark-6 Groomer

The **BallPark-6** is the original groomer. It combines five essential and individually adjustable grooming tools as illustrated. Hundreds of ball diamonds in North America are now being groomed regularly with the **BallPark-6**.

Options available for both models include:

50 Gallon Water Spray Tank, Extension Wing Brush Kit, & Hydraulic Top Link.

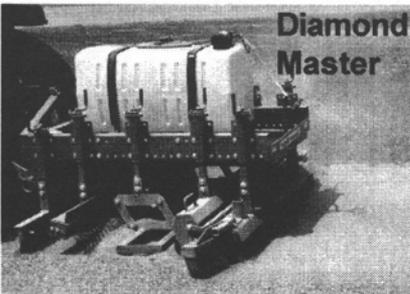

**Diamond Master**

### Diamond Master

The **Diamond Master** carries the same tools, does the same job, but we've made it much easier. Individual tool adjustments can now be made with simple screw jacks.

That's a big help when you have 5 to 20 diamonds to do in a hurry.

# BANNERMAN

The home of  
Sportsturf Magic

41 Kelfield Street ~ Rexdale, Ontario ~ M9W 5A3  
CDN 1-800-325-4871 • USA 1-800-665-2696